



CD32S31A

Ultra-high precision, I²C interface, integrated RTC/TCXO/crystal

Version: Rev 1.0.0 Date: 2025-6-25

Features ■

- Highly Accurate RTC Completely Manages All Timekeeping Functions
- Real-Time Clock Counts Seconds, Minutes, Hours, Date of the Month, Month, Day of the Week, and Year, with Leap-Year Compensation
- Accuracy $\pm 2\text{ppm}$ from 0°C to $+40^\circ\text{C}$
- Accuracy $\pm 3.5\text{ppm}$ from -40°C to $+85^\circ\text{C}$
- Digital Temp Sensor Output: $\pm 3^\circ\text{C}$ Accuracy
- Register for Aging Trim
- RST Output/Pushbutton Reset Debounce Input
- Two Time-of-Day Alarms
- Programmable Square-Wave Output Signal
- Simple Serial Interface Connects to Most Microcontrollers
- Fast (400kHz) I2C Interface
- Battery-Backup Input for Continuous Timekeeping
- Low Power Operation Extends Battery-Backup Run Time
- 3.3V Operation
- Operating Temperature Ranges: Commercial (0°C to $+70^\circ\text{C}$) and Industrial (-40°C to $+85^\circ\text{C}$)

Application ■

- Servers
- Telematics
- Utility Power Meters
- GPS

Description

The CD32S31A is a low-cost, extremely accurate I2C real-time clock (RTC) with an integrated temperaturecompensated crystal oscillator (TCXO) and crystal. The device incorporates a battery input, and maintains accurate timekeeping when main power to the device is interrupted. The integration of the crystal resonator enhances the long-term accuracy of the device as well as reduces the piece-part count in a manufacturing line. The CD32S31A is available in commercial and industrial temperature ranges, and is offered in a 16-pin, 300-mil SOP package. The RTC maintains seconds, minutes, hours, day, date, month, and year information. The date at the end of the month is automatically adjusted for months with fewer than 31 days, including corrections for leap year. The clock operates in either the 24-hour or 12-hour format with an AM/PM indicator. Two programmable time-of-day alarms and a programmable square-wave output are provided. Address and data are transferred serially through an I2C bidirectional bus. A precision temperature-compensated voltage reference and comparator circuit monitors the status of VCC to detect power failures, to provide a reset output, and to automatically switch to the backup supply when necessary. Additionally, the RST pin is monitored as a pushbutton input for generating a μ P reset.



Contents

| | |
|---|--------|
| Features | - 1 - |
| Application | - 1 - |
| Description | - 2 - |
| Pin Configurations | - 4 - |
| Pin Description | - 4 - |
| Functional Block diagram | - 6 - |
| Typical Application Circuit | - 7 - |
| Absolute Maximum Ratings | - 7 - |
| Operating Temperatures Range | - 7 - |
| DC Electrical Characteristics | - 8 - |
| AC Electrical Characteristics | - 10 - |
| Power-Up/Power-Down Characteristics | - 11 - |
| Timing | - 12 - |
| Typical Electrical Characteristics | - 13 - |
| Package Outline Dimensions | - 23 - |
| Package/Ordering Information | - 24 - |
| Revision Log | - 25 - |

Pin Configurations

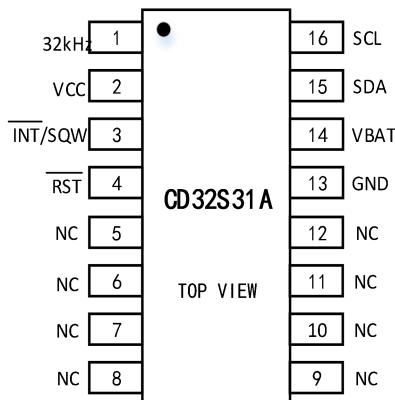


Figure 1. SOP16 Pin Configuration

Pin Description

Table 1. Pin description

| Pin No. | Pin Name | Description |
|---------|-----------------|--|
| 1 | 32kHz | 32kHz Output. This open-drain pin requires an external pullup resistor. When enabled, the output operates on either power supply. It may be left open if not used. |
| 2 | V _{CC} | DC Power Pin for Primary Power Supply. This pin should be decoupled using a 0.1 μ F to 1.0 μ F capacitor. If not used, connect to ground. |
| 3 | INT/SQW | Active-Low Interrupt or Square-Wave Output. This open-drain pin requires an external pullup resistor connected to a supply at 5.5V or less. This multifunction pin is determined by the state of the INTCN bit in the Control Register (0Eh). When INTCN is set to logic 0, this pin outputs a square wave and its frequency is determined by RS2 and RS1 bits. When INTCN is set to logic 1, then a match between the timekeeping registers and either of the alarm registers activates the INT/SQW pin (if the alarm is enabled). Because the INTCN bit is set to logic 1 when power is first applied, the pin defaults to an interrupt output with alarms disabled. The pullup voltage can be up to 5.5V, regardless of the voltage on V _{CC} . If not used, this pin can be left unconnected. |
| 4 | RST | Active-Low Reset. This pin is an open-drain input/output. It indicates the status of V _{CC} relative to the VPF specification. As V _{CC} falls below VPF, the RST pin is driven low. When V _{CC} exceeds VPF, for t _{RST} , the RST pin is pulled high by the internal pullup resistor. The active-low, open-drain |

| | | |
|------|------------------|---|
| | | output is combined with a debounced pushbutton input function. This pin can be activated by a pushbutton reset request. It has an internal 50kΩ nominal value pullup resistor to VCC. No external pullup resistors should be connected. If the oscillator is disabled, tREC is bypassed and RST immediately goes high. |
| 5-12 | NC | No Connection. Must be connected to ground |
| 13 | GND | Ground |
| 14 | V _{BAT} | Backup Power-Supply Input. When using the device with the VBAT input as the primary power source, this pin should be decoupled using a 0.1μF to 1.0μF low-leakage capacitor. When using the device with the VBAT input as the backup power source, the capacitor is not required. If VBAT is not used, connect to ground. The device is UL recognized to ensure against reverse charging when used with a primary lithium battery. |
| 15 | SDA | Serial Data Input/Output. This pin is the data input/output for the I2C serial interface. This open-drain pin requires an external pullup resistor. The pullup voltage can be up to 5.5V, regardless of the voltage on VCC. |
| 16 | SCL | Serial Clock Input. This pin is the clock input for the I2C serial interface and is used to synchronize data movement on the serial interface. Up to 5.5V can be used for this pin, regardless of the voltage on VCC |
| 1 | 32kHz | 32kHz Output. This open-drain pin requires an external pullup resistor. When enabled, the output operates on either power supply. It may be left open if not used. |
| 2 | V _{CC} | DC Power Pin for Primary Power Supply. This pin should be decoupled using a 0.1μF to 1.0μF capacitor. If not used, connect to ground. |
| 3 | INT/SQW | Active-Low Interrupt or Square-Wave Output. This open-drain pin requires an external pullup resistor connected to a supply at 5.5V or less. This multifunction pin is determined by the state of the INTCN bit in the Control Register (0Eh). When INTCN is set to logic 0, this pin outputs a square wave and its frequency is determined by RS2 and RS1 bits. When INTCN is set to logic 1, then a match between the timekeeping registers and either of the alarm registers activates the INT/SQW pin (if the alarm is enabled). Because the INTCN bit is set to logic 1 when power is first applied, the pin defaults to an interrupt output with alarms disabled. The pullup voltage can be up to 5.5V, regardless of the voltage on VCC. If not used, this pin can be left unconnected. |
| 4 | RST | Active-Low Reset. This pin is an open-drain input/output. It indicates the status of VCC relative to the VPF specification. As VCC falls below VPF, the RST pin is driven low. When VCC exceeds VPF, for tRST, the RST pin is pulled high by the internal pullup resistor. The active-low, open-drain output is combined with a debounced pushbutton input function. This |

| | | |
|------|-----|--|
| | | pin can be activated by a pushbutton reset request. It has an internal $50\text{k}\Omega$ nominal value pullup resistor to VCC. No external pullup resistors should be connected. If the oscillator is disabled, tREC is bypassed and RST immediately goes high. |
| 5-12 | NC | No Connection. Must be connected to ground |
| 13 | GND | Ground |

Notes:

1. Equivalent to discharging a 100 pF capacitor via a 1.5 k Ω series resistor.
2. Equivalent to discharging a 200 pF capacitor via a 0.75 μH series inductor and a 10 Ω series resistor.
3. Junction temperature in accordance with IEC 60747-1. An alternative definition of T_{vj} is: $T_{vj} = T_{amb} + P \times R_{th(vj-amb)}$, where $R_{th(vj-amb)}$ is a fixed value to be used for the calculating of T_{vj} . The rating for T_{vj} limits the combinations of power dissipation (P) and ambient temperature (Tamb).

Functional Block diagram

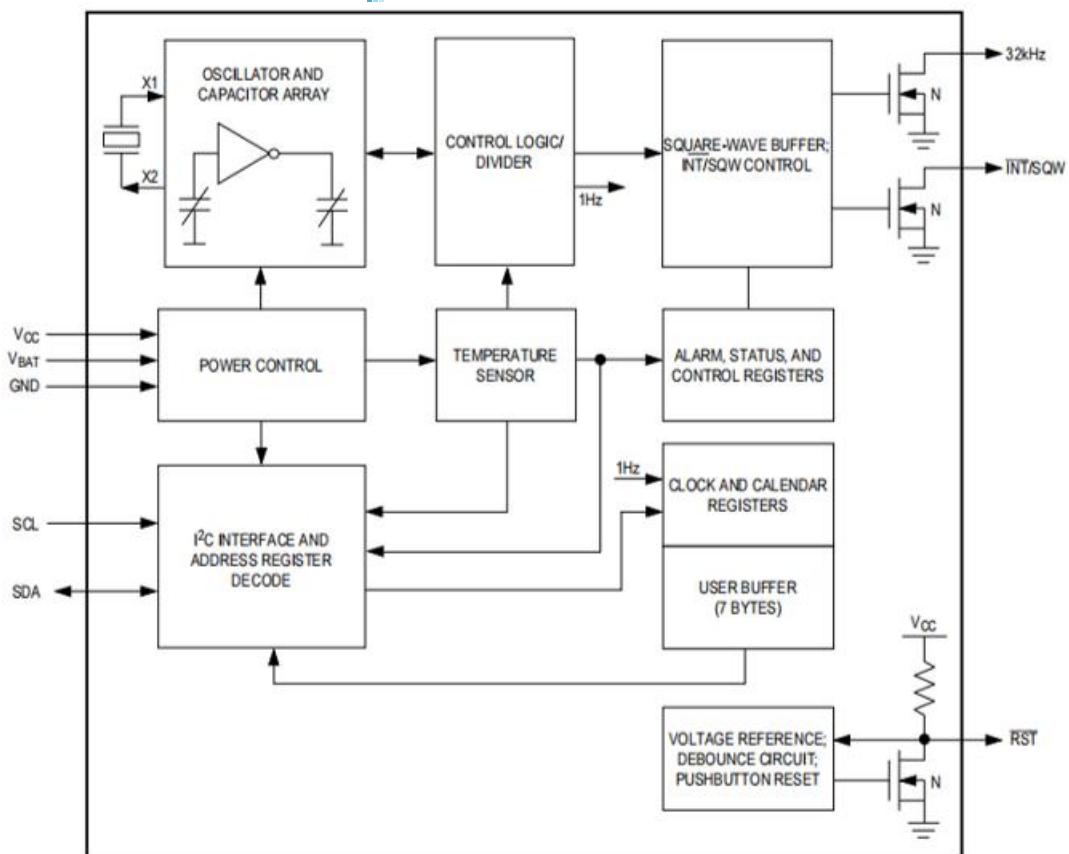


Figure 2. Functional Block Diagram

Typical Application Circuit

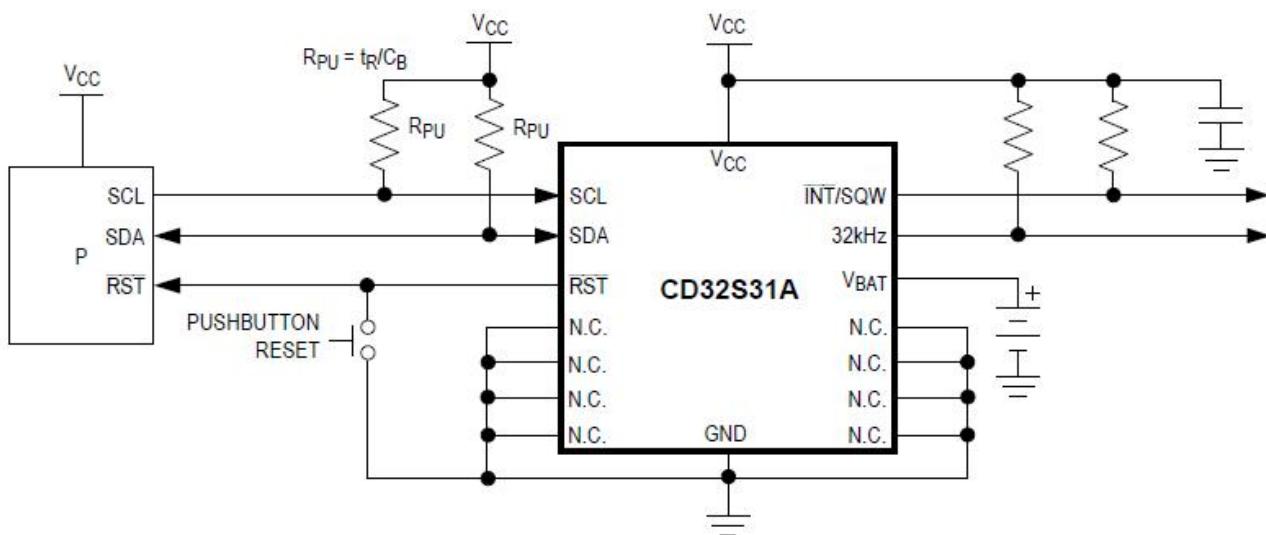


Figure 3. Typical Application Circuit Diagram

Absolute Maximum Ratings

| Parameter | Range |
|--|----------------|
| Voltage Range on Any Pin Relative to GND | -0.3 V to +6 V |
| Operating Temperature Range | -40°C to +85°C |
| Storage Temperature Range | -40°C to +85°C |
| Lead Temperature (soldering, 10s) | 260°C |
| Soldering Temperature (reflow) | 260°C |
| Junction-to-Ambient Thermal Resistance (θ_{JA}) | 73°C/W |
| Junction-to-Case Thermal Resistance (θ_{JC}) | 23°C/W |

Operating Temperatures Range

($T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 2, 3)

| Parameter | Symbol | Conditions | Min | Typ | Max | Units |
|----------------|--------|------------|-----|-----|-----|-------|
| Supply Voltage | VCC | | 2.3 | 3.3 | 5.5 | V |
| | VBAT | | 2.3 | 3.0 | 5.5 | |

| | | | | | | |
|--------------------------|----------|--|-------------|--|--------------|---|
| Logic0 Input SDA, SCL | V_{IL} | | -0.3 | | $+0.3V_{CC}$ | V |
| Logic1 Input SDA, SCL | V_{IH} | | $0.7V_{CC}$ | | $V_{CC}+0.3$ | V |

DC Electrical Characteristics

(V_{CC} = 2.3V to 5.5V, V_{CC} = Active Supply (see Table 1), T_A = T_{MIN} to T_{MAX} , unless otherwise noted.)

(Typical values are at VCC = 3.3V, V_{BAT} = 3.0V, and TA = +25°C, unless otherwise noted.) (Notes 2, 3)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|---------------|---|------|-------|------|------|
| Active Supply Current | I_{CCA} | (Notes 4, 5) V_{CC} = 3.63V | -- | -- | 200 | μA |
| | | (Notes 4, 5) V_{CC} = 5.5V | -- | -- | 300 | μA |
| Standby Supply Current | I_{CCS} | I2C bus inactive, 32kHz output on, SQW output off (Note 5) V_{CC} = 3.63V | -- | -- | 110 | μA |
| | | I2C bus inactive, 32kHz output on, SQW output off (Note 5) V_{CC} = 5.5V | -- | -- | 170 | |
| Temperature Conversion Current | $I_{CCSConv}$ | I2C bus inactive, 32kHz output on, SQW output off, V_{CC} = 3.63V | -- | -- | 575 | μA |
| | | I2C bus inactive, 32kHz output on, SQW output off, V_{CC} = 5.5V | -- | -- | 650 | μA |
| Power-Fail Voltage | V_{PF} | | 2.45 | 2.575 | 2.70 | V |
| Logic 0 Output, 32kHz, INT/SQW, SDA | V_{OL} | I_{OL} = 3mA | -- | -- | 0.4 | V |
| Logic 0 Output, \overline{RST} | V_{OL} | I_{OL} = 1mA | -- | -- | 0.4 | V |
| Output Leakage Current— 32kHz, INT/SQW, SDA | I_{LO} | Output high impedance | -1 | 0 | +1 | μA |
| Input Leakage SCL | I_{LI} | | -1 | -- | +1 | μA |
| \overline{RST} Pin I/O Leakage | I_{OL} | RST high impedance (Note 6) | -200 | -- | +10 | μA |

| | | | | | | |
|--|---------------------|--|----|--------|------|-----------|
| V _{BAT} Leakage Current (V _{CC} Active) | I _{BATLKG} | | -- | 25 | 100 | nA |
| Output Frequency | f _{OUT} | VCC = 3.3V or V _{BAT} = 3.3V | -- | 32.768 | -- | kHz |
| Frequency Stability vs. Temperature | Δf/f _{OUT} | VCC = 3.3V or V _{BAT} = 3.3V, aging offset = 00h | -- | -- | ±3.5 | ppm |
| Frequency Stability vs. Voltage | Δf/V | | -- | 1 | -- | ppm/ V |
| Trim Register Frequency Sensitivity per LSB | Δf/LSB | | -- | 0.8 | -- | ppm |
| Temperature Accuracy | Temp | VCC = 3.3V or V _{BAT} = 3.3V | -3 | -- | +3 | °C |
| Crystal Aging | Δf/f _O | After reflow, not production tested, First year | -- | ±1.0 | -- | ppm |
| | | After reflow, not production tested, 0-10 years | -- | ±5.0 | -- | ppm |

(V_{CC} = 0V, V_{BAT} = 2.3V to 5.5V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.) (Note 2)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|-------------|---|--------------|------|------|------|
| Active Battery Current | IBATA | EOSC = 0, BBSQW = 0, SCL = 400kHz (Note 5) | VBAT = 3.63V | -- | -- | 70 |
| | | | VBAT = 5.5V | -- | -- | 150 |
| Timekeeping Current | IBATT | EOSC = 0, BBSQW = 0, EN32kHz = 1, SCL = SDA = 0V or SCL = SDA = VBAT (Note 5) | VBAT = 3.63V | -- | 0.84 | 3.0 |
| | | | VBAT = 5.5V | -- | 1.0 | 3.5 |
| Temperature Conversion Current | IBATTC | EOSC = 0, BBSQW = 0, SCL = SDA = 0V or SCL = SDA = VBAT | VBAT = 3.63V | -- | -- | 575 |
| | | | VBAT = 5.5V | -- | -- | 650 |
| Data-Retention Current | IBATTD R | EOSC = 1, SCL = SDA = 0V, +25°C | -- | -- | 100 | nA |

AC Electrical Characteristics

($V_{CC} = V_{CC(MIN)} \text{ to } V_{CC(MAX)}$ or $V_{BAT} = V_{BAT(MIN)} \text{ to } V_{BAT(MAX)}$, $V_{BAT} > V_{CC}$, $T_A = T_{MIN} \text{ to } T_{MAX}$, unless otherwise noted.) (Note 2)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|--------------|---------------|--------------|------|------|---------|
| SCL Clock Frequency | f_{SCL} | Fast mode | 100 | -- | 400 | kHz |
| | | Standard mode | 0 | -- | 100 | |
| Bus Free Time Between STOP and START Condition | t_{BUF} | Fast mode | 1.3 | -- | -- | μs |
| | | Standard mode | 4.7 | -- | -- | |
| Hold Time (Repeated) START Condition (Note 7) | $t_{HD:STA}$ | Fast mode | 0.6 | -- | -- | μs |
| | | Standard mode | 4.0 | -- | -- | |
| LOW Period of SCL Clock | t_{LOW} | Fast mode | 1.3 | -- | -- | μs |
| | | Standard mode | 4.7 | -- | -- | |
| Data Hold Time (Notes 8, 9) | $t_{HD:DAT}$ | Fast mode | 0 | -- | 0.9 | μs |
| | | Standard mode | 0 | -- | -- | |
| Data Setup Time (Note 10) | $t_{SU:DAT}$ | Fast mode | 100 | -- | -- | ns |
| | | Standard mode | 250 | -- | -- | |
| START Setup Time | $t_{SU:STA}$ | Fast mode | 0.6 | -- | -- | ns |
| | | Standard mode | 4.7 | -- | -- | |
| Rise Time of Both SDA and SCL Signals (Note 11) | t_R | Fast mode | $20+0.1 C_B$ | -- | 300 | ns |
| | | Standard mode | $20+0.1 C_B$ | -- | 1000 | |
| Fall Time of Both SDA and SCL Signals (Note 11) | t_F | Fast mode | $20+0.1 C_B$ | -- | 300 | ns |
| | | Standard mode | $20+0.1 C_B$ | -- | 1000 | |
| Setup Time for STOP Condition | $t_{SU:STO}$ | Fast mode | 0.6 | -- | -- | μs |
| | | Standard mode | 4.7 | -- | -- | |
| Capacitive Load for Each Bus Line | C_B | (Note 11) | -- | -- | 400 | pF |
| I/O Capacitance (SDA, SCL) | $C_{I/O}$ | | -- | -- | 10 | pF |
| Oscillator Stop Flag (OSF) Delay | t_{OSF} | (Note 12) | -- | 100 | -- | ms |

| | | | | | |
|---|------------|----|-----|-----|----|
| Pulse Width of Spikes That Must Be Suppressed by the Input Filter | t_{SP} | -- | 30 | -- | ns |
| Pushbutton Debounce | PB_{DB} | -- | 250 | -- | ms |
| Reset Active Time | t_{RST} | -- | 250 | -- | ms |
| Temperature Conversion Time | t_{CONV} | -- | 125 | 200 | ms |

Power-Up/Power-Down Characteristics

($T_A = T_{MIN}$ to T_{MAX})

| Parameter | Symbol | Min. | Typ. | Max. | Unit |
|--|------------|------|------|------|---------|
| Recovery at Power-Up (Note 15) | t_{REC} | -- | 250 | 300 | ms |
| V_{CC} Fall Time; $V_{PF(MAX)}$ to $V_{PF(MIN)}$ | t_{VCCF} | 300 | -- | -- | μ s |
| V_{CC} Rise Time; $V_{PF(MIN)}$ to $V_{PF(MAX)}$ | t_{VCCR} | 0 | -- | -- | μ s |

WARNING: Negative undershoots below -0.3V while the part is in battery-backed mode may cause loss of data.

Note 1: Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations,

Note 2: Limits at -40°C are guaranteed by design and not production tested.

Note 3: All voltages are referenced to ground.

Note 4: I_{CCA} —SCL clocking at max frequency = 400kHz.

Note 5: Current is the averaged input current, which includes the temperature conversion current.

Note 6: The RST pin has an internal 50k Ω (nominal) pullup resistor to V_{CC} .

Note 7: After this period, the first clock pulse is generated.

Note 8: A device must internally provide a hold time of at least 300ns for the SDA signal (referred to the $V_{IH(MIN)}$ of the SCL signal) to bridge the undefined region of the falling edge of SCL.

Note 9: The maximum $t_{HD:DAT}$ needs only to be met if the device does not stretch the low period (t_{LOW}) of the SCL signal.

Note 10: A fast-mode device can be used in a standard-mode system, but the requirement $t_{SU:DAT} \geq 250$ ns must then be met. This is automatically the case if the device does not stretch the low period of the SCL signal. If such a device does stretch the low period of the SCL signal, it

must output the next data bit to the SDA line $t_{R(MAX)} + t_{SU:DAT} = 1000 + 250 = 1250\text{ns}$ before the SCL line is released.

Note 11: CB—total capacitance of one bus line in pF.

Note 12: The parameter t_{OSF} is the period of time the oscillator must be stopped for the OSF flag to be set over the voltage range of $0.0\text{V} \leq V_{CC} \leq V_{CC(MAX)}$ and $2.3\text{V} \leq V_{BAT} \leq 3.4\text{V}$.

Note 13: This delay applies only if the oscillator is enabled and running. If the EOSC bit is a 1, t_{REC} is bypassed and RST immediately goes high. The state of RST does not affect the I2C interface, RTC, or TCXO.

Timing

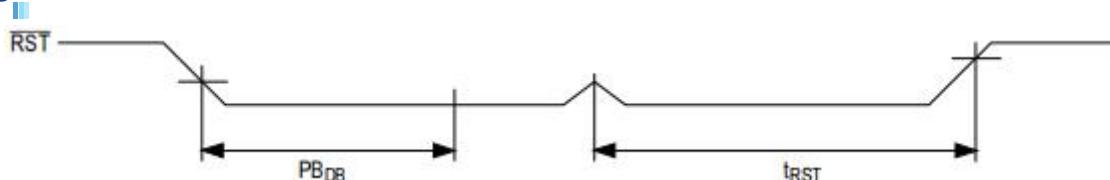


Figure 4. Pushbutton Reset Timing

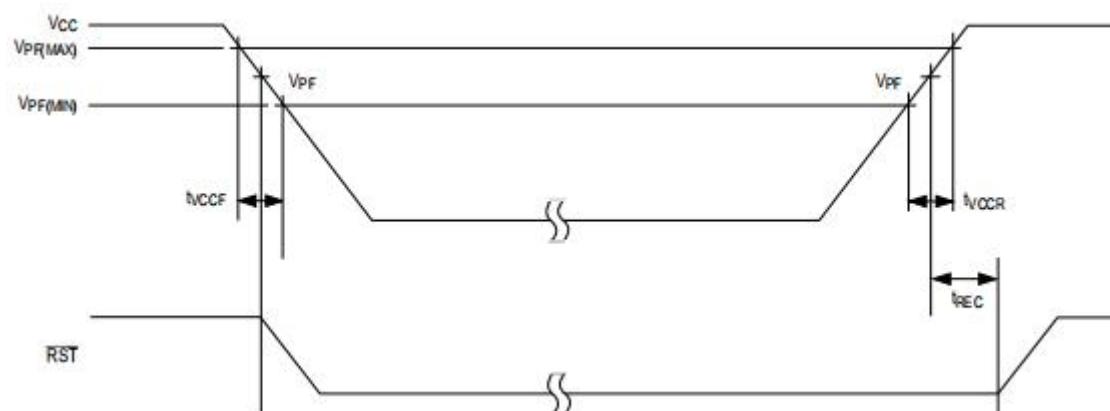


Figure 5. Power-Switch Timing

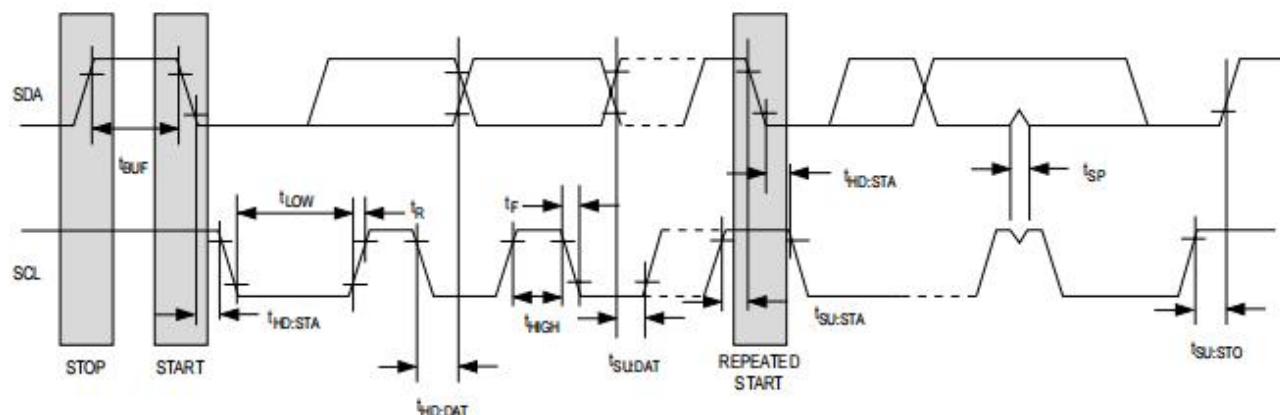


Figure 6. Data Transfer on I2C Serial Bus

Typical Electrical Characteristics

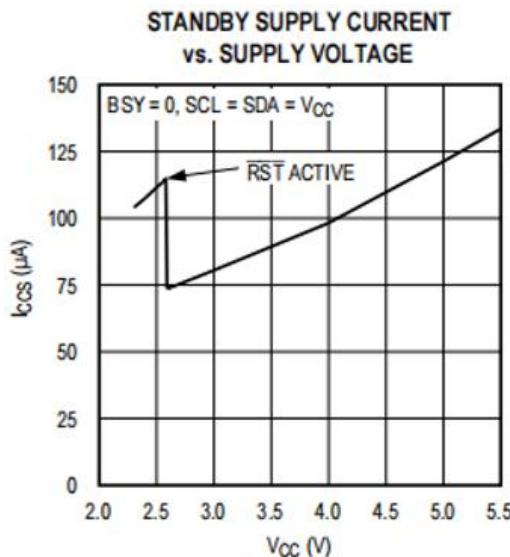


Figure 7. STANDBY SUPPLY CURRENT vs. SUPPLY VOLTAGE

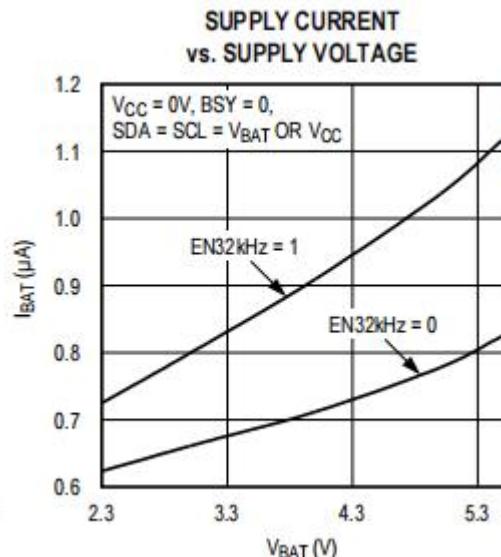


Figure 8. SUPPLY CURRENT vs. SUPPLY VOLTAGE

DETAILED DESCRIPTION

The CD32S31A is a serial RTC driven by a temperature compensated 32kHz crystal oscillator. The TCXO provides a stable and accurate reference clock, and maintains the RTC to within ± 2 minutes per year accuracy from -40°C to $+85^{\circ}\text{C}$. The TCXO frequency output is available at the 32kHz pin. The RTC is a low-power clock/calendar with two programmable time-of-day alarms and a programmable square-wave output. The INT/SQW provides either an interrupt signal due to alarm conditions or a square-wave output. The clock/calendar provides seconds, minutes, hours, day, date, month, and year information. The date at the end of the month is automatically adjusted for months with fewer than 31 days, including corrections for leap year. The clock operates in either the 24-hour or 12-hour format with an AM/PM indicator. The internal registers are accessible through an I₂C bus interface. A temperature-compensated voltage reference and comparator circuit monitors the level of V_{CC} to detect power failures and to automatically switch to the backup supply when necessary. The RST pin provides an external pushbutton function and acts as an indicator of a power-fail event.

Operation

The block diagram shows the main elements of the CD32S31A. The eight blocks can be grouped into four functional groups: TCXO, power control, pushbutton function, and RTC. Their operations are described separately in the following sections.

32kHz TCXO

The temperature sensor, oscillator, and control logic form the TCXO. The controller reads the output of the on-chip temperature sensor and uses a lookup table to determine the capacitance required, adds the aging correction in AGE register, and then sets the capacitance selection registers. New values, including changes to the AGE register, are loaded only when a change in the temperature value occurs, or when a user-initiated temperature conversion is completed. Temperature conversion occurs on initial application of VCC and once every 64 seconds afterwards.

Power Control

This function is provided by a temperature-compensated voltage reference and a comparator circuit that monitors the VCC level. When VCC is greater than VPF, the part is powered by VCC. When VCC is less than VPF but greater than VBAT, the CD32S31A is powered by VCC. If VCC is less than VPF and is less than VBAT, the device is powered by VBAT. See Table 1.

Table 1. Power Control

| Supply Condition | Active Supply |
|-------------------------------------|---------------|
| $V_{CC} < V_{PF}, V_{CC} < V_{BAT}$ | V_{BAT} |
| $V_{CC} < V_{PF}, V_{CC} > V_{BAT}$ | V_{CC} |
| $V_{CC} > V_{PF}, V_{CC} < V_{BAT}$ | V_{CC} |
| $V_{CC} > V_{PF}, V_{CC} > V_{BAT}$ | V_{CC} |

To preserve the battery, the first time VBAT is applied to the device, the oscillator will not start up until VCC exceeds VPF, or until a valid I2C address is written to the part. Typical oscillator startup time is less than one second. Approximately 2 seconds after VCC is applied, or a valid I2C address is written, the device makes a temperature measurement and applies the calculated correction to the oscillator. Once the oscillator is running, it continues to run as long as a valid power source is available (VCC or VBAT), and the device continues to measure the temperature and correct the oscillator frequency every 64 seconds. On the first application of power (VCC) or when a valid I2C address is written to the part (VBAT), the time and date registers are reset to 01/01/00 01 00:00:00 (DD/MM/YY DOW HH:MM:SS).

VBAT Operation

There are several modes of operation that affect the amount of VBAT current that is drawn. While the device is powered by VBAT and the serial interface is active, active battery current, IBATA, is

drawn. When the serial interface is inactive, timekeeping current (IBATT), which includes the averaged temperature conversion current, IBATTC, is used (refer to Application Note 3644: Power Considerations for Accurate Real-Time Clocks for details). Temperature conversion current, IBATTC, is specified since the system must be able to support the periodic higher current pulse and still maintain a valid voltage level. Data retention current, IBATTDR, is the current drawn by the part when the oscillator is stopped ($\text{EOSC} = 1$). This mode can be used to minimize battery requirements for times when maintaining time and date information is not necessary, e.g., while the end system is waiting to be shipped to a customer.

Pushbutton Reset Function

The CD32S31A provides for a pushbutton switch to be connected to the RST output pin. When the CD32S31A is not in a reset cycle, it continuously monitors the RST signal for a low going edge. If an edge transition is detected, the CD32S31A debounces the switch by pulling the RST low. After the internal timer has expired (PBDB), the CD32S31A continues to monitor the RST line. If the line is still low, the CD32S31A continuously monitors the line looking for a rising edge. Upon detecting release, the CD32S31A forces the RST pin low and holds it low for tRST. RST is also used to indicate a power-fail condition. When VCC is lower than VPF, an internal power-fail signal is generated, which forces the RST pin low. When VCC returns to a level above VPF, the RST pin is held low for approximately 250ms (tREC) to allow the power supply to stabilize. If the oscillator is not running (see the Power Control section) when VCC is applied, tREC is bypassed and RST immediately goes high. Assertion of the RST output, whether by pushbutton or power-fail detection, does not affect the internal operation of the CD32S31A.

Real-Time Clock

With the clock source from the TCXO, the RTC provides seconds, minutes, hours, day, date, month, and year information. The date at the end of the month is automatically adjusted for months with fewer than 31 days, including corrections for leap year. The clock operates in either the 24-hour or 12-hour format with an AM/PM indicator. The clock provides two programmable time-of-day alarms and a programmable square-wave output. The INT/SQW pin either generates an interrupt due to alarm condition or outputs a square-wave signal and the selection is controlled by the bit INTCN.

Timekeeping Registers

Note: Unless otherwise specified, the registers' state is not defined when power is first applied

| ADDRESS | BIT 7 MSB | BIT 6 | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BIT 1 | BIT 0 LSB | FUNCTION | RANGE |
|---------|--------------|------------|------------------|----------|---------|---------|-------|--------------|-------------------|-----------------------|
| 00h | 0 | 10 Seconds | | | | Seconds | | | | Seconds 00–59 |
| 01h | 0 | 10 Minutes | | | | Minutes | | | | Minutes 00–59 |
| 02h | 0 | 12/24 | AM/PM 20 Hour | 10 Hour | Hour | | | | Hours | 1–12 + AM/PM 00–23 |
| 03h | 0 | 0 | 0 | 0 | 0 | Day | | | | Day 1–7 |
| 04h | 0 | 0 | 10 Date | | Date | | | | Date | 01–31 |
| 05h | Century | 0 | 0 | 10 Month | Month | | | | Month/ Century | 01–12 + Century |
| 06h | 10 Year | | | | Year | | | | Year | 00–99 |
| 07h | A1M1 | 10 Seconds | | | | Seconds | | | | Alarm 1 Seconds 00–59 |
| 08h | A1M2 | 10 Minutes | | | | Minutes | | | | Alarm 1 Minutes 00–59 |
| 09h | A1M3 | 12/24 | AM/PM 20 Hour | 10 Hour | Hour | | | | Alarm 1 Hours | 1–12 + AM/PM 00–23 |
| 0Ah | A1M4 | DY/DT | 10 Date | | Day | | | | Alarm 1 Day | 1–7 |
| | | | | | Date | | | | Alarm 1 Date | 1–31 |
| 0Bh | A2M2 | 10 Minutes | | | | Minutes | | | | Alarm 2 Minutes 00–59 |
| 0Ch | A2M3 | 12/24 | AM/PM 20 Hour | 10 Hour | Hour | | | | Alarm 2 Hours | 1–12 + AM/PM 00–23 |
| 0Dh | A2M4 | DY/DT | 10 Date | | Day | | | | Alarm 2 Day | 1–7 |
| | | | | | Date | | | | Alarm 2 Date | 1–31 |
| 0Eh | EOSC | BBSQW | CONV | RS2 | RS1 | INTCN | A2IE | A1IE | Control | — |
| 0Fh | OSF | 0 | 0 | 0 | EN32KHz | BSY | A2F | A1F | Control/Status | — |
| 10h | SIGN | DATA | DATA | DATA | DATA | DATA | DATA | DATA | Aging Offset | — |
| 11h | SIGN | DATA | DATA | DATA | DATA | DATA | DATA | DATA | MSB of Temp | — |
| 12h | DATA | DATA | 0 | 0 | 0 | 0 | 0 | 0 | LSB of Temp | — |

Address Map

The above shows the address map for the CD32S31A timekeeping registers. During a multibyte access, when the address pointer reaches the end of the register space (12h), it wraps around to location 00h. On an I2C START or address pointer incrementing to location 00h, the current time is transferred to a second set of registers. The time information is read from these secondary registers, while the clock may continue to run. This eliminates the need to reread the registers in case the main registers update during a read.

I2C Interface

The I2C interface is accessible whenever either VCC or VBAT is at a valid level. If a microcontroller connected to the CD32S31A resets because of a loss of VCC or other event, it is possible that the microcontroller and CD32S31A I2C communications could become unsynchronized, e.g., the microcontroller resets while reading data from the CD32S31A. When the microcontroller resets, the CD32S31A I2C interface may be placed into a known state by toggling SCL until SDA is

observed to be at a high level. At that point the microcontroller should pull SDA low while SCL is high, generating a START condition.

Clock and Calendar

The time and calendar information is obtained by reading the appropriate register bytes. Figure 1 illustrates the RTC registers. The time and calendar data are set or initialized by writing the appropriate register bytes. The contents of the time and calendar registers are in the binary-coded decimal (BCD) format. The CD32S31A can be run in either 12-hour or 24-hour mode. Bit 6 of the hours register is defined as the 12- or 24-hour mode select bit. When high, the 12-hour mode is selected. In the 12-hour mode, bit 5 is the AM/PM bit with logic-high being PM. In the 24-hour mode, bit 5 is the 20-hour bit (20–23 hours). The century bit (bit 7 of the month register) is toggled when the years register overflows from 99 to 00. The day-of-week register increments at midnight. Values that correspond to the day of week are user-defined but must be sequential (i.e., if 1 equals Sunday, then 2 equals Monday, and so on). Illogical time and date entries result in undefined operation. When reading or writing the time and date registers, secondary (user) buffers are used to prevent errors when the internal registers update. When reading the time and date registers, the user buffers are synchronized to the internal registers on any START and when the register pointer rolls over to zero. The time information is read from these secondary registers, while the clock continues to run. This eliminates the need to reread the registers in case the main registers update during a read. The countdown chain is reset whenever the seconds register is written. Write transfers occur on the acknowledge from the CD32S31A. Once the countdown chain is reset, to avoid rollover issues the remaining time and date registers must be written within 1 second. The 1Hz square-wave output, if enabled, transitions high 500ms after the seconds data transfer, provided the oscillator is already running.

Alarms

The CD32S31A contains two time-of-day/date alarms. Alarm 1 can be set by writing to registers 07h to 0Ah. Alarm 2 can be set by writing to registers 0Bh to 0Dh. The alarms can be programmed (by the alarm enable and INTCN bits of the control register) to activate the INT/SQW output on an alarm match condition. Bit 7 of each of the time-of-day/date alarm registers are mask bits (Table 2). When all the mask bits for each alarm are logic 0, an alarm only occurs when the values in the timekeeping registers match the corresponding values stored in the time-of-day/date alarm registers. The alarms can also be programmed to repeat every second, minute, hour, day, or date. Table 2 shows the possible settings. Configurations not listed in the table will result in illogical operation. The DY/DT bits (bit 6 of the alarm day/date registers) control whether the alarm value stored in bits 0 to 5 of that register reflects the day of the week

or the date of the month. If DY/DT is written to logic 0, the alarm will be the result of a match with date of the month. If DY/DT is written to logic 1, the alarm will be the result of a match with day of the week. When the RTC register values match alarm register settings, the corresponding Alarm Flag 'A1F' or 'A2F' bit is set to logic 1. If the corresponding Alarm Interrupt Enable 'A1IE' or 'A2IE' is also set to logic 1 and the INTCN bit is set to logic 1, the alarm condition will activate the INT/SQW signal. The match is tested on the once-per second update of the time and date registers.

| DY/DT | ALARM 1 REGISTER MASK BITS (BIT 7) | | | | ALARM RATE |
|-------|------------------------------------|------|------|------|--|
| | A1M4 | A1M3 | A1M2 | A1M1 | |
| X | 1 | 1 | 1 | 1 | Alarm once per second |
| X | 1 | 1 | 1 | 0 | Alarm when seconds match |
| X | 1 | 1 | 0 | 0 | Alarm when minutes and seconds match |
| X | 1 | 0 | 0 | 0 | Alarm when hours, minutes, and seconds match |
| 0 | 0 | 0 | 0 | 0 | Alarm when date, hours, minutes, and seconds match |
| 1 | 0 | 0 | 0 | 0 | Alarm when day, hours, minutes, and seconds match |

| DY/DT | ALARM 2 REGISTER MASK BITS (BIT 7) | | | | ALARM RATE |
|-------|------------------------------------|------|------|------|--|
| | A1M4 | A1M3 | A1M2 | A1M1 | |
| X | 1 | 1 | 1 | 1 | Alarm once per second |
| X | 1 | 1 | 1 | 0 | Alarm when seconds match |
| X | 1 | 1 | 0 | 0 | Alarm when minutes and seconds match |
| X | 1 | 0 | 0 | 0 | Alarm when hours, minutes, and seconds match |
| 0 | 0 | 0 | 0 | 0 | Alarm when date, hours, minutes, and seconds match |

Control Register (0Eh)

| — | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|-------|------|------|------|-------|------|------|
| Name | EOSC | BBSQW | CONV | RS2 | RS1 | INTCN | A2IE | A1IE |
| Por | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 |

Special-Purpose Registers

The CD32S31A has two additional registers (control and status) that control the real-time clock, alarms, and squarewave output.

Control Register (0Eh)

Bit 7: Enable Oscillator (EOSC). When set to logic 0, the oscillator is started. When set to logic 1, the oscillator is stopped when the CD32S31A switches to VBAT. This bit is clear (logic 0) when power is first applied. When the CD32S31A is powered by VCC, the oscillator is always on regardless of the status of the EOSC bit. When EOSC is disabled, all register data is static.

Bit 6: Battery-Backed Square-Wave Enable (BBSQW).

When set to logic 1 with INTCN = 0 and VCC < VPF, this bit enables the square wave. When BBSQW is logic 0, the INT/SQW pin goes high impedance when VCC < VPF. This bit is disabled (logic 0) when power is first applied.

Bit 5: Convert Temperature (CONV). Setting this bit to 1 forces the temperature sensor to convert the temperature into digital code and execute the TCXO algorithm to update the capacitance array to the oscillator. This can only happen when a conversion is not already in progress. The user should check the status bit BSY before forcing the controller to start a new TCXO execution. A user-initiated temperature conversion does not affect the internal 64-second update cycle. A user-initiated temperature conversion does not affect the BSY bit for approximately 2ms. The CONV bit remains at a 1 from the time it is written until the conversion is finished, at which time both CONV and BSY go to 0. The CONV bit should be used when monitoring the status of a user-initiated conversion.

Bits 4 and 3: Rate Select (RS2 and RS1).

These bits control the frequency of the square-wave output when the square wave has been enabled. The following table shows the square-wave frequencies that can be selected with the RS bits. These bits are both set to logic 1 (8.192kHz) when power is first applied.

SQUARE-WAVE OUTPUT FREQUENCY

| RS2 | RS1 | SQUARE-WAVE OUTPUT FREQUENCY |
|-----|-----|------------------------------|
| 0 | 0 | 1Hz |
| 0 | 1 | 1.024kHz |
| 1 | 0 | 4.096kHz |
| 1 | 1 | 8.192kHz |

Bit 2: Interrupt Control (INTCN).

This bit controls the INT/SQW signal. When the INTCN bit is set to logic 0, a square wave is output on the INT/SQW pin. When the INTCN bit is set to logic 1, then a match between the time keeping registers and either of the alarm registers activates the INT/SQW output (if the alarm is also enabled). The corresponding alarm flag is always set regardless of the state of the INTCN bit. The INTCN bit is set to logic 1 when power is first applied.

Bit 1: Alarm 2 Interrupt Enable (A2IE).

When set to logic 1, this bit permits the alarm 2 flag (A2F) bit in the status register to assert

INT/SQW (when INTCN = 1). When the A2IE bit is set to logic 0 or INTCN is set to logic 0, the A2F bit does not initiate an interrupt signal. The A2IE bit is disabled (logic 0) when power is first applied.

Bit 0: Alarm 1 Interrupt Enable (A1IE).

When set to logic 1, this bit permits the alarm 1 flag (A1F) bit in the status register to assert INT/SQW (when INTCN = 1). When the A1IE bit is set to logic 0 or INTCN is set to logic 0, the A1F bit does not initiate the INT/SQW signal. The A1IE bit is disabled (logic 0) when power is first applied.

Status Register (0Fh)

| — | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|-------------|------|------|------|------|---------|------|------|------|
| Name | OSF | 0 | 0 | 0 | EN32kHz | BSY | A2F | A1F |
| Por | 1 | 0 | 0 | 0 | 1 | X | X | X |

Status Register (0Fh)

Bit 7: Oscillator Stop Flag (OSF).

A logic 1 in this bit indicates that the oscillator either is stopped or was stopped for some period and may be used to judge the validity of the timekeeping data. This bit is set to logic 1 any time that the oscillator stops. The following are examples of conditions that can cause the OSF bit to be set:

- 1) The first time power is applied.
- 2) The voltages present on both VCC and VBAT are insufficient to support oscillation.
- 3) The EOSC bit is turned off in battery-backed mode.
- 4) External influences on the crystal (i.e., noise, leakage, etc.).

This bit remains at logic 1 until written to logic 0.

Bit 3: Enable 32kHz Output (EN32kHz).

This bit controls the status of the 32kHz pin. When set to logic 1, the 32kHz pin is enabled and outputs a 32.768kHz square wave signal. When set to logic 0, the 32kHz pin goes to a high-impedance state. The initial power-up state of this bit is logic 1, and a 32.768kHz square-wave signal appears at the 32kHz pin after a power source is applied to the CD32S31A (if the oscillator is running).

Bit 2: Busy (BSY).

This bit indicates the device is busy executing TCXO functions. It goes to logic 1 when the conversion signal to the temperature sensor is asserted and then is cleared when the device is in the 1-minute idle state.

Bit 1: Alarm 2 Flag (A2F).

A logic 1 in the alarm 2 flag bit indicates that the time matched the alarm 2 registers. If the A2IE bit is logic 1 and the INTCN bit is set to logic 1, the INT/SQW pin is also asserted. A2F is cleared when written to logic 0. This bit can only be written to logic 0. Attempting to write to logic 1 leaves the value unchanged.

Bit 0: Alarm 1 Flag (A1F).

A logic 1 in the alarm 1 flag bit indicates that the time matched the alarm 1 registers. If the A1IE bit is logic 1 and the INTCN bit is set to logic 1, the INT/SQW pin is also asserted. A1F is cleared when written to logic 0. This bit can only be written to logic 0. Attempting to write to logic 1 leaves the value unchanged.

Aging Offset

The aging offset register takes a user-provided value to add to or subtract from the codes in the capacitance array registers. The code is encoded in two's complement, with bit 7 representing the sign bit. One LSB represents one small capacitor to be switched in or out of the capacitance array at the crystal pins. The aging offset register capacitance value is added or subtracted from the capacitance value that the device calculates for each temperature compensation. The offset register is added to the capacitance array during a normal temperature conversion, if the temperature changes from the previous conversion, or during a manual user conversion (setting the CONV bit). To see the effects of the aging register on the 32kHz output frequency immediately, a manual conversion should be started after each aging register change. Positive aging values add capacitance to the array, slowing the oscillator frequency. Negative values remove capacitance from the array, increasing the oscillator frequency. The change in ppm per LSB is different at different temperatures. The frequency vs. temperature curve is shifted by the values used in this register. At +25°C, one LSB typically provides about 0.1ppm change in frequency. Use of the aging register is not needed to achieve the accuracy as defined in the EC tables, but could be used to help compensate for aging at a given temperature. See the Typical Operating Characteristics section for a graph showing the effect of the register on accuracy over temperature.

Aging Offset (10h)

| — | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|------|
| Name | Sign | Data |
| Por | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Temperature Register (Upper Byte) (11h)

| — | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|------|
| Name | Sign | Data |
| Por | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Temperature Register (Lower Byte) (12h)

| — | Bit7 | Bit6 | Bit5 | Bit4 | Bit3 | Bit2 | Bit1 | Bit0 |
|------|------|------|------|------|------|------|------|------|
| Name | Data | Data | 0 | 0 | 0 | 0 | 0 | 0 |
| Por | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Temperature Registers (11h-12h)

Temperature is represented as a 10-bit code with a resolution of 0.25°C and is accessible at location 11h and 12h. The temperature is encoded in two's complement format. The upper 8 bits, the integer portion, are at location 11h and the lower 2 bits, the fractional portion, are in the upper nibble at location 12h. For example, 0001100101b = +25.25°C. Upon power reset, the registers are set to a default temperature of 0°C and the controller starts a temperature conversion. The temperature is read on initial application of VCC or I2C access on VBAT and once every 64 seconds afterwards. The temperature registers are updated after each user-initiated conversion and on every 64-second conversion. The temperature registers are read-only.

I2C Serial Data Bus

The CD32S31A supports a bidirectional I2C bus and data transmission protocol. A device that sends data onto the bus is defined as a transmitter and a device receiving data is defined as a receiver. The device that controls the message is called a master. The devices that are controlled by the master are slaves. The bus must be controlled by a master device that generates the serial clock (SCL), controls the bus access, and generates the START and STOP conditions. The CD32S31A operates as a slave on the I2C bus. Connections to the bus are made through the SCL input and open-drain SDA I/O lines. Within the bus specifications, a standard mode (100kHz maximum clock rate) and a fast mode (400kHz maximum clock rate) are defined. The CD32S31A works in both modes.

The following bus protocol has been defined (Figure 9):

- Data transfer may be initiated only when the bus is not busy.
- During data transfer, the data line must remain stable whenever the clock line is high. Changes in the data line while the clock line is high are interpreted as control signals.

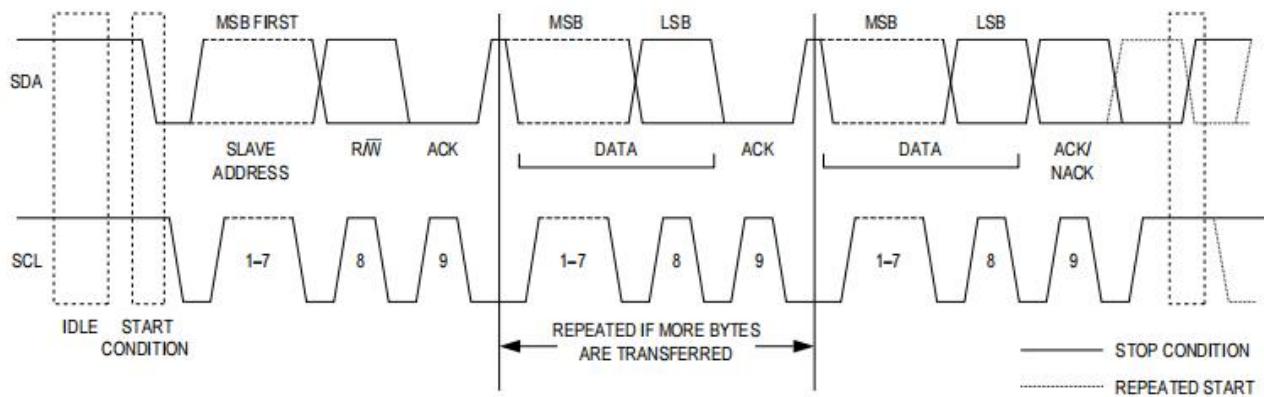


Figure 9. I2C Data Transfer Overview

Package Outline Dimensions

SOP-16

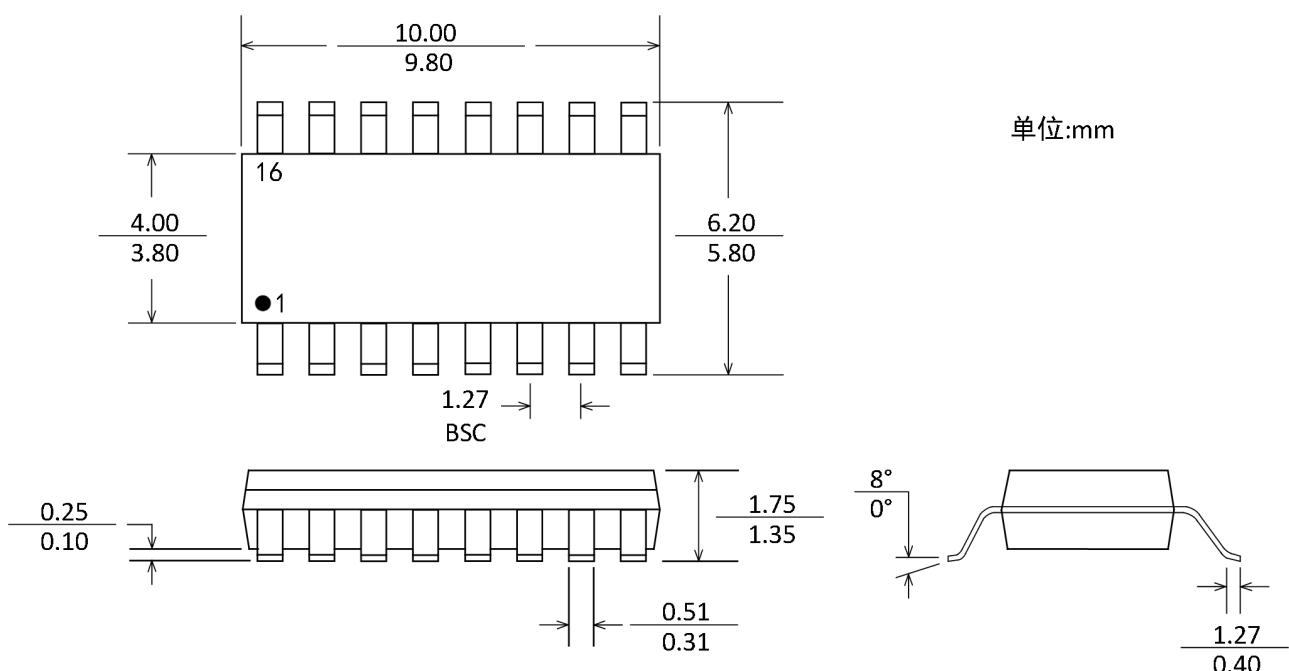


Figure 10 . 16-Lead Outline Package [SOP-16]



Package/Ordering Information

| MODEL | TEMPERATURE | PACKAGE DESCRIPTION | PACKAGE OPTION |
|-------------|-------------|---------------------|---------------------|
| CD32S31AS16 | -40°C~85°C | SOP-16 | Tape and Reel, 2500 |



Revision Log



| Version | Revision date | Change content | Reason for Change | Modified by | Reviewed By | Note |
|---------|---------------|-----------------|-------------------|-------------|-------------|------|
| V1.0 | 2025.6.25 | Initial version | Regular update | WW | LYL | |