



CD8091 CD8092 CD8094

Low-Cost, High-Speed, Rail-to-Rail Amplifier

Version: Rev 1.0.0 Date: 2025-5-26

Features ■■

- Single-Supply Operation from 2.5V~+5.5V
- Rail-to-Rail Output
- -3dB Bandwidth(G= +1): 350MHz (Typ.)
- Low Input Bias Current: 1pA (Typ.)
- Quiescent Current: 4.2mA/Amplifier (Typ.)
- Operating Temperature: -40°C ~ +125°C
- Small Package:
 - CD8091 Available in SOT23-5 and SC70-5 Packages
 - CD8092 Available in SOP-8 and MSOP-8 Packages
 - CD8094 Available in SOP-14 and TSSOP-14 Packages
 - CD8091N Available in SOT23-6 and SC70-6 Packages
 - CD8092N Available in MSOP-10 Packages

Application ■■

- Imaging
- Photodiode Preamp
- DVD/CD
- Filters
- Professional Video and
- Hand Sets
- Base Stations
- to-D Driver

Description ■■

The CD8091 / 1N (single), CD8092 / 2N(dual), CD8094 (quad) are rail-to-rail output voltage feedback amplifiers offering ease of use and low cost. They have bandwidth and slew rate typically found in current feedback amplifiers. All have a wide input common-mode voltage range and output voltage swing, making them easy to use on single supplies as low as 2.5V. Despite being low cost, the CD8091 series provide excellent overall performance. They offer wide bandwidth to 350MHz (G = +1) along with 0.1dB flatness out to 58MHz (G = +2) and offer a typical low power of 4.2mA/amplifier.

The CD8091 series is low distortion and fast settling make it ideal for buffering high speed A/D or D/A converters. The CD8091 / 2N has a power-down disable feature that reduces the supply current to 75µA. These features make the CD8091 / 2N ideal for portable and battery-powered applications where size and power are critical. All are specified over the extended -40 °C to +125°C temperature range.

Contents

Features..... - 1 -

Application..... - 1 -

Description..... - 1 -

Pin Configurations.....- 3 -

Absolute Maximum Ratings..... - 4 -

Electrical characteristics..... - 5 -

Typical Characteristics..... - 8 -

Application Notes.....- 10 -

Typical Application Circuits..... - 12 -

Package Outline Dimensions..... - 14 -

Package/Ordering Information..... - 23 -

Revision Log..... - 24 -

Pin Configurations

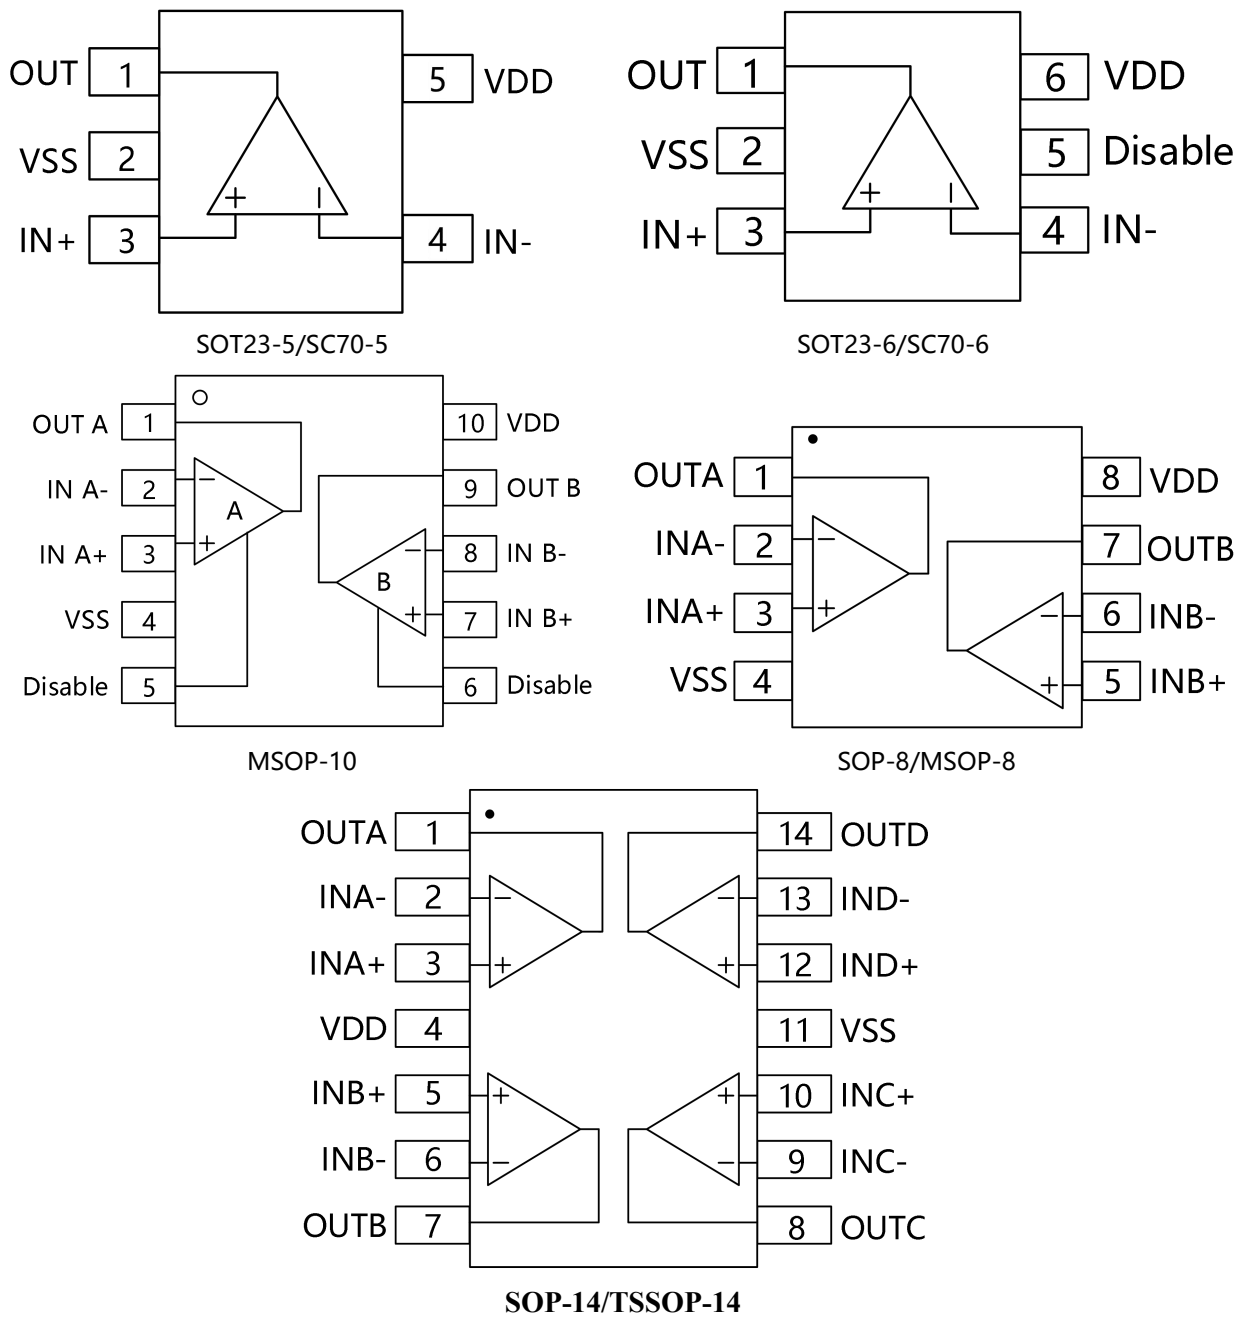


Figure 1. Pin Assignment Diagram

Absolute Maximum Ratings

Condition	Min	Max
Power Supply Voltage (V _{DD} to VSS)	-0.5V	+7.5V
Analog Input Voltage (IN+ or IN-)	VSS-0.5V	V _{DD} +0.5V
PDB Input Voltage	VSS-0.5V	+7V
Operating Temperature Range	-40°C	+125°C
Junction Temperature	+160°C	
Storage Temperature Range	-65°C	+150°C
Lead Temperature (soldering, 10sec)	+300°C	
Package Thermal Resistance (T _A = +25°C)		
SOP-8, θ _{JA}	125°C/W	
MSOP-8, θ _{JA}	216°C/W	
SOT23-5, θ _{JA}	190°C/W	
SOT23-6, θ _{JA}	190°C/W	
SC70-5, θ _{JA}	333°C/W	
ESD Susceptibility		
HBM	6KV	
MM	400V	

Electrical characteristics

($G=+2$, $R_F=600\Omega$, $R_G=600\Omega$, and $R_L=150\Omega$ connected to $V_S/2$, unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.)

PARAMETER	CONDITIONS	CD8051/CD8052/CD8054/CD8051N/CD8052N						
		TYP	MIN/MAX OVER TEMPERATURE					
		+25°C	+25°C	0°C to 70°C	-40°C to 85°C	-40°C to 125°C	UNIT	MIN/MAX
DYNAMIC PERFORMANCE								
3dB Small Signal Bandwidth	G=+1,V _O =0.1Vp-p,R _F =24Ω,R _L =150Ω	335	--	--	--	--	MHz	TYP
	G=+1,V _O =0.1Vp-p,R _F =24Ω,R _L =1kΩ	330	--	--	--	--	MHz	TYP
	G=+2,V _O =0.1Vp-p,R _L =50Ω	79	--	--	--	--	MHz	TYP
	G=+2,V _O =0.1Vp-p,R _L =150Ω	130	--	--	--	--	MHz	TYP
	G=+2,V _O =0.1Vp-p,R _L =1kΩ	165	--	--	--	--	MHz	TYP
	G=+2,V _O =0.1Vp-p,R _L =10kΩ	172	--	--	--	--	MHz	TYP
Gain-Bandwidth Product	G=+10,R _L =150Ω	180	--	--	--	--	MHz	TYP
	G=+10,R _L =1kΩ	195	--	--	--	--	MHz	TYP
Bandwidth for 0.1dB Flatness	G=+2,V _O =0.1Vp-,R _L =150Ω,R _F =600Ω	71	--	--	--	--	MHz	TYP
Slew Rate	G=+1,2VOutputStep	119/-232	--	--	--	--	V/μs	TYP
	G=+2,2VOutputStep	135/-180	--	--	--	--	V/μs	TYP
	G=+2,4VOutputStep	142/-206	--	--	--	--	V/μs	TYP
Rise-and-Fall Time	G=+2,V _O =0.2Vp-p,10%to90%	3.5	--	--	--	--	ns	TYP
	G=+2,V _O =2Vp-p,10%to90%	8.5	--	--	--	--	ns	TYP

Settling Time to 0.1%	$G=+2, 2V_{OutputStep}$	35	--	--	--	--	ns	TYP
Overload Recovery Time	$V_{IN} \cdot G = +V_S$	14.5	--	--	--	--	ns	TYP
NOISE/DISTORTION PERFORMANCE								
Input Voltage Noise	$f = 1MHz$	4.3	--	--	--	--	nV/Hz	TYP
Differential Gain Error (NTSC)	$G = +2, R_L = 150\Omega$	0.004	--	--	--	--	%	TYP
Differential Phase Error (NTSC)	$G = +2, R_L = 150\Omega$	0.08	--	--	--	--	degree	TYP
DC PERFORMANCE								
Input Offset Voltage (V_{OS})		± 2	± 8	± 8.5	± 9	± 9.3	mV	MAX
Input Offset Voltage Drift		2					$\mu V/^\circ C$	TYP
Input Bias Current (I_B)		1					pA	TYP
Input offset Current (I_{OS})		2					pA	TYP
Open-Loop Gain (A_{OL})	$V_O = 0.3V \text{ to } 4.7V, R_L = 150\Omega$	80	75	74	74	70	dB	MIN
	$V_O = 0.2V \text{ to } 4.8V, R_L = 1k\Omega$	104	92	91	91	80	dB	MIN
INPUT CHARACTERISTICS								
Input Common-Mode Voltage Range (V_{CM})		-0.2 to +3.8					V	TYP
Common-Mode Rejection Ratio (CMRR)	$V_{CM} = -0.1V \text{ to } +3.5V$	80	66	65	65	62	dB	MIN

($G=+2$, $R_F=600\Omega$, $R_G=600\Omega$, and $R_L=150\Omega$ connected to $V_S/2$, unless otherwise noted. Typical values are at $T_A = +25^\circ C$.)

PARAMETER	CONDI TIONS	CD8051/CD8052/CD8054/CD8051N/CD8052N						
		TYP	MIN/MAX OVER TEMPERATURE					
		+25°C	+25°C	0°C to 70°C	−40°C to 85°C	−40°C to 125°C	UNIT S	MIN/MAX
OUTPUT CHARACTERISTICS								
Output Voltage Swing from Rail	R _L = 150Ω	0.12					V	TYP
	R _L = 1kΩ	0.03					V	TYP
Output Current		120	100	98	93	87	mA	MIN
Closed-Loop Output Impedance	f<100kHz	0.045						TYP
POWER-DOWN DISABLE								
(CD8091/2N only)								
Turn-On Time			108				ns	TYP
Turn-Off Time			60				ns	TYP
DISABLE Voltage-Off				0.8			V	MAX
POWER SUPPLY								
Operating Voltage Range			2.5	2.7	2.7	2.7	V	MIN
			5.5	5.5	5.5	5.5	V	MAX
Quiescent Current (per amplifier)		4.2	5.3	5.6	5.7	6.1	mA	MAX
Supply Current when Disabled per amplifier(CD8091/2N only)		75	120	130	132	137	μA	MAX
Power Supply Rejection Ratio (PSRR)	ΔV _S = +2.7V to +5.5V, V _{CM} = (-V _S) +0.5	80	67	67	65	62	dB	MIN


Typical Characteristics

($V_S = +5V$, $G = +2$, $R_F = 600\Omega$, $R_G = 600\Omega$, and $R_L = 150\Omega$ connected to $V_S/2$, unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.)


Non-Inverting Large-Signal Step Response




Non-Inverting Small-Signal Step Response

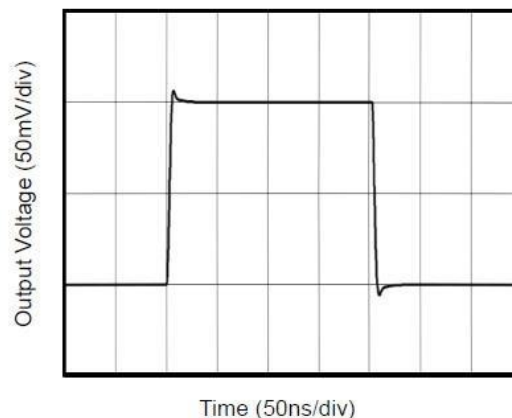


Supply Current vs. Temperature

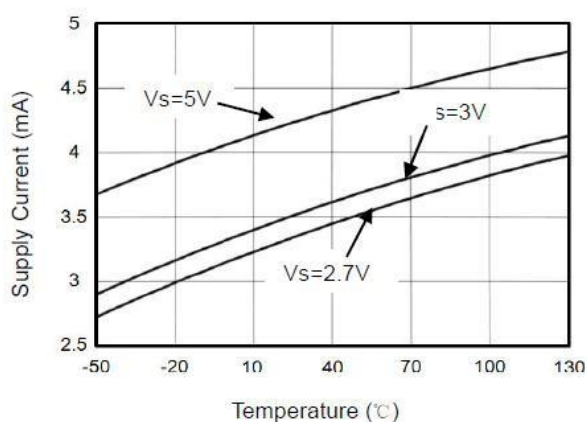


Shutdown Current vs. Temperature

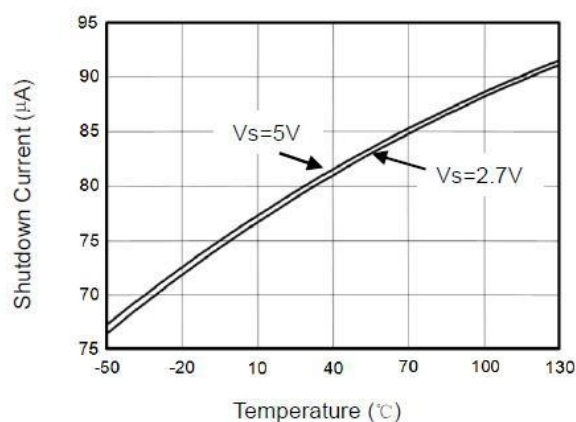







Output Voltage Swing vs. Output Current

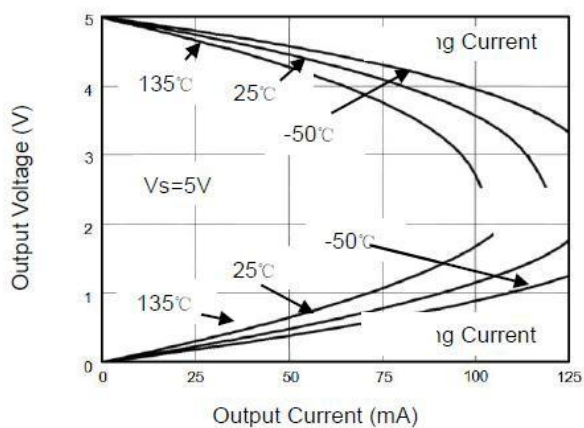

Output Voltage vs. Output Current




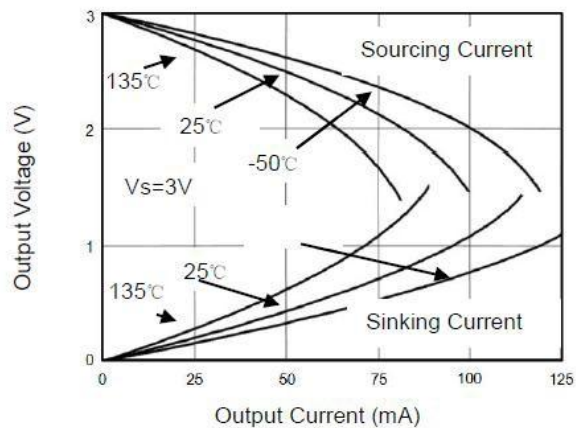


($V_s = +5V$, $G = +2$, $R_F = 600\Omega$, $R_G = 600\Omega$, and $R_L = 150\Omega$ connected to $V_s/2$, unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.)

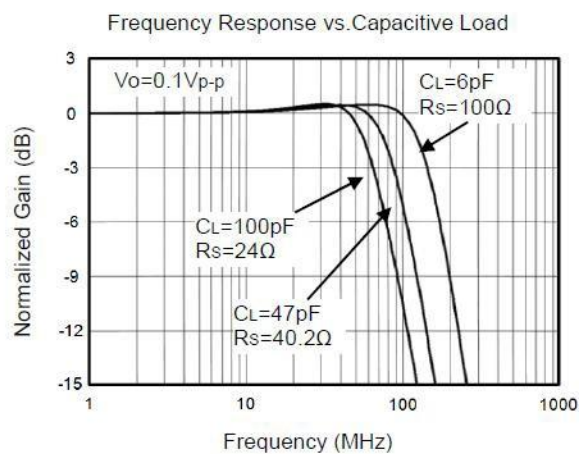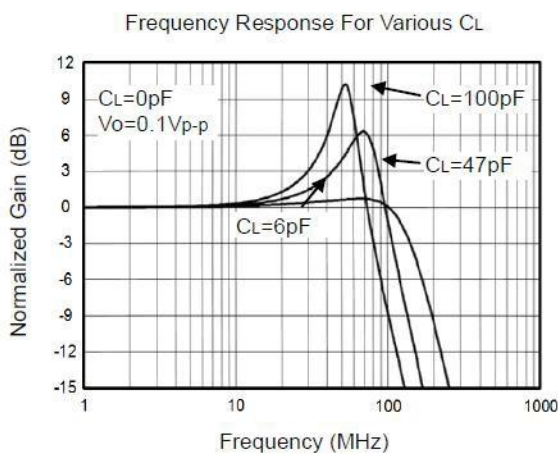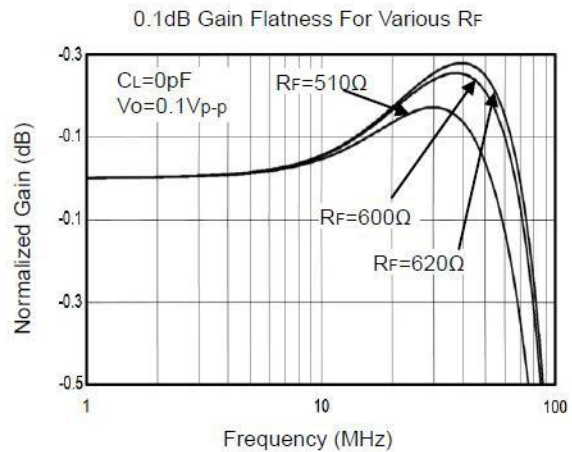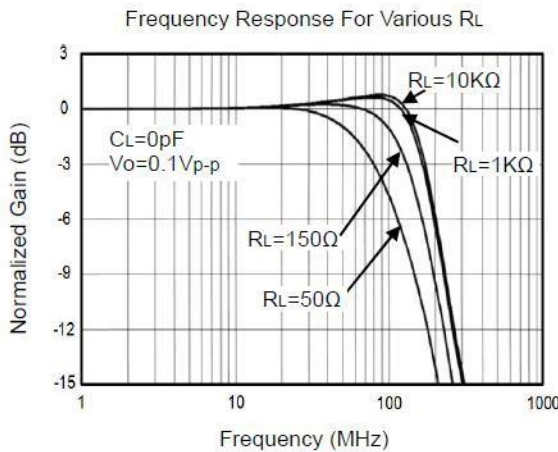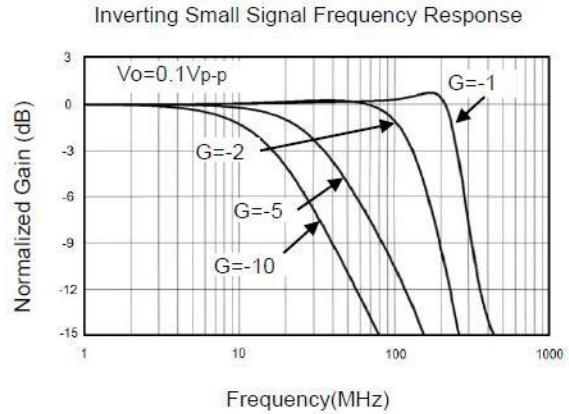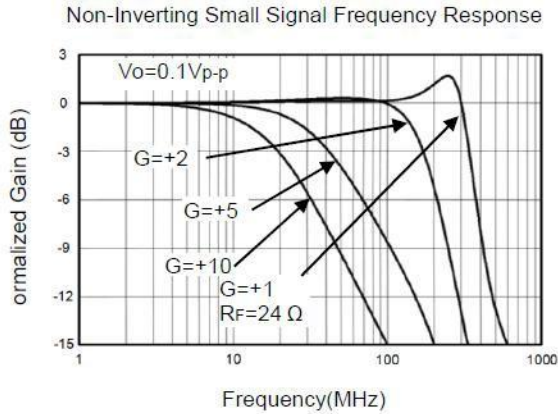

($V_s = +5V$, $G = +2$, $R_F = 600\Omega$, $R_G = 600\Omega$, and $R_L = 150\Omega$ connected to $V_s/2$, unless otherwise

noted. Typical values are at $T_A = +25^\circ\text{C}$.)

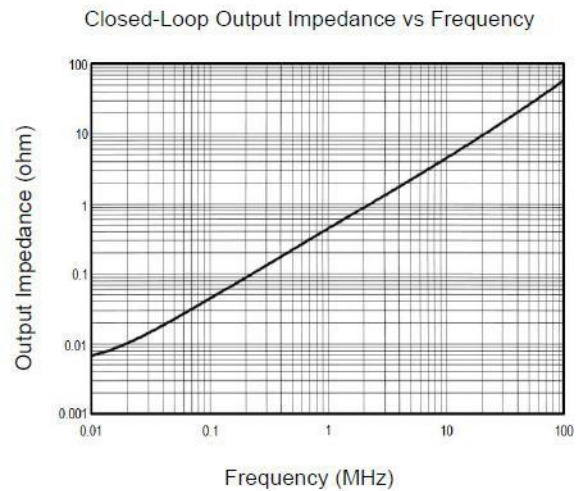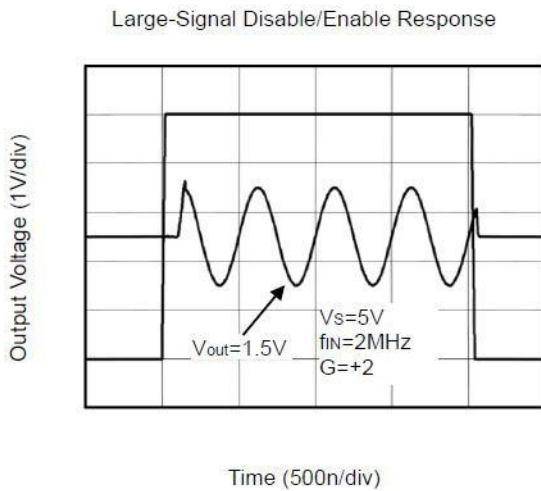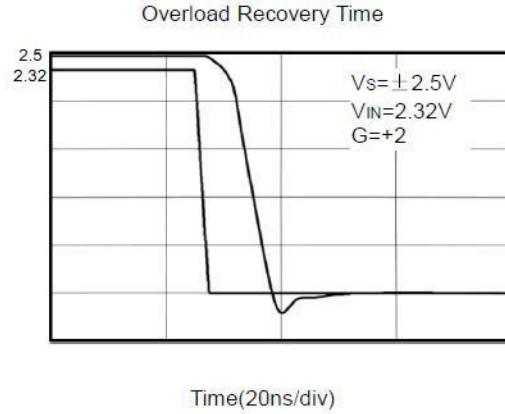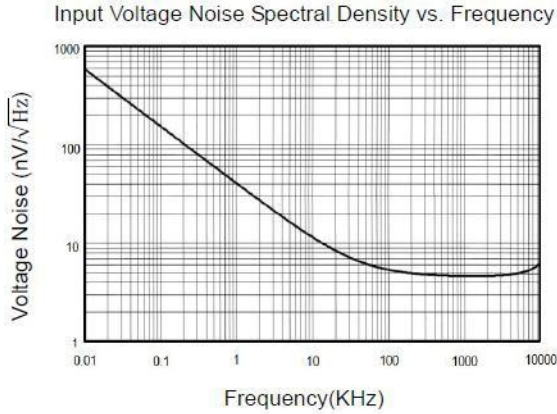

Application Notes

Size

CD809X series op amps are unity-gain stable and suitable for a wide range of general-purpose applications. The small footprints of the CD809X series packages save space on printed circuit boards and enable the design of smaller electronic products.

Power Supply Bypassing and Board Layout

CD809X series operates from a single 2.5V to 5.5V supply or dual $\pm 1.25\text{V}$ to $\pm 2.75\text{V}$ supplies. For best performance, a $0.1\mu\text{F}$ ceramic capacitor should be placed close to the VDD pin in single supply operation. For dual supply operation, both VDD and VSS supplies should be bypassed to ground with separate $0.1\mu\text{F}$ ceramic capacitors.

Low Supply Current

The low supply current (typical 4.2mA per channel) of CD809X series will help to maximize battery life. They are ideal for battery powered systems.

Operating Voltage

CD809X series operate under wide input supply voltage (2.5V to 5.5V). In addition, all temperature specifications apply from -40°C to $+125^{\circ}\text{C}$. Most behavior remains unchanged throughout the full operating voltage range. These guarantees ensure operation throughout the single Li-Ion battery lifetime

Rail-to-Rail Output

Rail-to-Rail output swing provides maximum possible dynamic range at the output. This is particularly important when operating in low supply voltages. The output voltage of CD809X series can typically swing to less than 30mV from supply rail in light resistive loads ($>1\text{k}\Omega$), and 120mV of supply rail in moderate resistive loads (150Ω).

Capacitive Load Tolerance

The CD809X family is optimized for bandwidth and speed, not for driving capacitive loads. Output capacitance will create a pole in the amplifier's feedback path, leading to excessive peaking and potential oscillation. If dealing with load capacitance is a requirement of the application, the two strategies to consider are (1) using a small resistor in series with the amplifier's output and the load capacitance and (2) reducing the bandwidth of the amplifier's feedback loop by increasing the overall noise gain. Figure 2. shows a unity gain follower using the series resistor strategy. The resistor isolates the output from the capacitance and, more importantly, creates a zero in the feedback path that compensates for the pole created by the output capacitance.

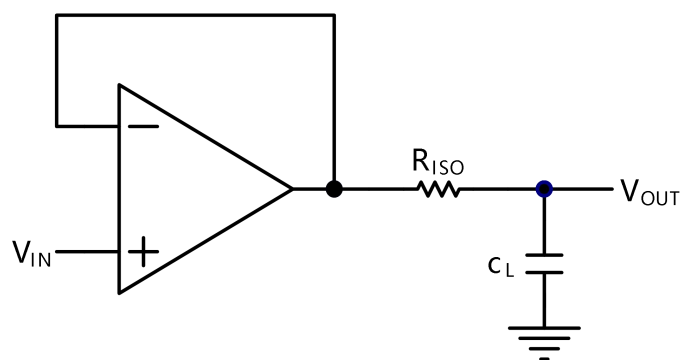


Figure 2. Indirectly Driving a Capacitive Load Using Isolation Resistor

The bigger the R_{ISO} resistor value, the more stable V_{OUT} will be. However, if there is a resistive load R_L in parallel with the capacitive load, a voltage divider (proportional to R_{ISO}/R_L) is formed, this will result in a gain error.

The circuit in Figure 3 is an improvement to the one in Figure 2. R_F provides the DC accuracy by feed-forward the V_{IN} to R_L . C_F and R_{ISO} serve to counteract the loss of phase margin by feeding the high frequency component of the output signal back to the amplifier's inverting input,

thereby preserving the phase margin in the overall feedback loop. Capacitive drive can be increased by increasing the value of C_F . This in turn will slow down the pulse response.

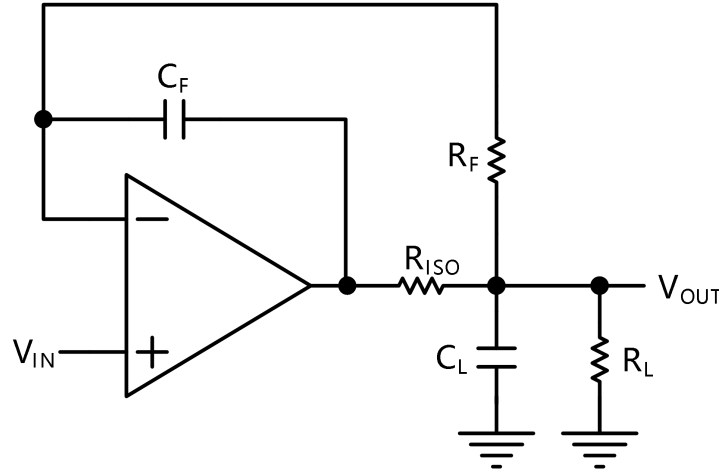


Figure 3. Indirectly Driving a Capacitive Load with DC Accuracy

Typical Application Circuits

Differential amplifier

The differential amplifier allows the subtraction of two input voltages or cancellation of a signal common to the two inputs. It is useful as a computational amplifier in making a differential to single-end conversion or in rejecting a common mode signal. Figure 4. shown the differential amplifier using CD809X.

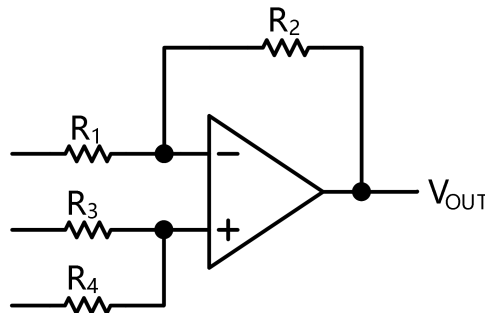


Figure 4. Differential Amplifier

$$V_{OUT} = \left(\frac{R_1 + R_2}{R_3 + R_4} \right) \frac{R_4}{R_1} V_{IN} - \frac{R_2}{R_1} V_{IP} + \left(\frac{R_1 + R_2}{R_3 + R_4} \right) \frac{R_3}{R_1} V_{REF}$$

If the resistor ratios are equal (i.e. $R_1=R_3$ and $R_2=R_4$), then

$$V_{OUT} = \frac{R_2}{R_1} (V_{IP} - V_{IN}) + V_{REF}$$

Low Pass Active Filter

The low pass active filter is shown in Figure 5. The DC gain is defined by $-R_2/R_1$. The filter has a -20dB/decade roll-off after its corner frequency $f_C = 1/(2\pi R_3 C_1)$.

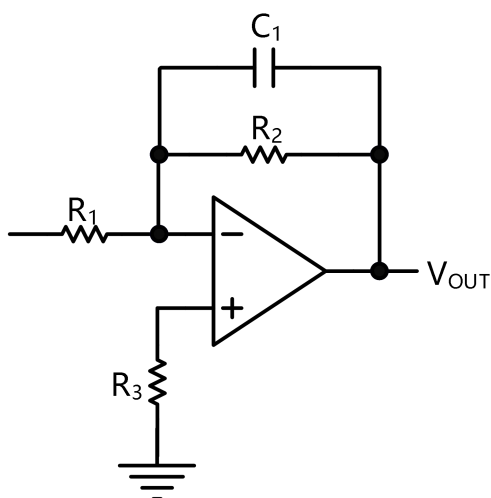


Figure 5. Low Pass Active Filter

Driving Video

The CD809X can be used in video applications like in Figure 6.


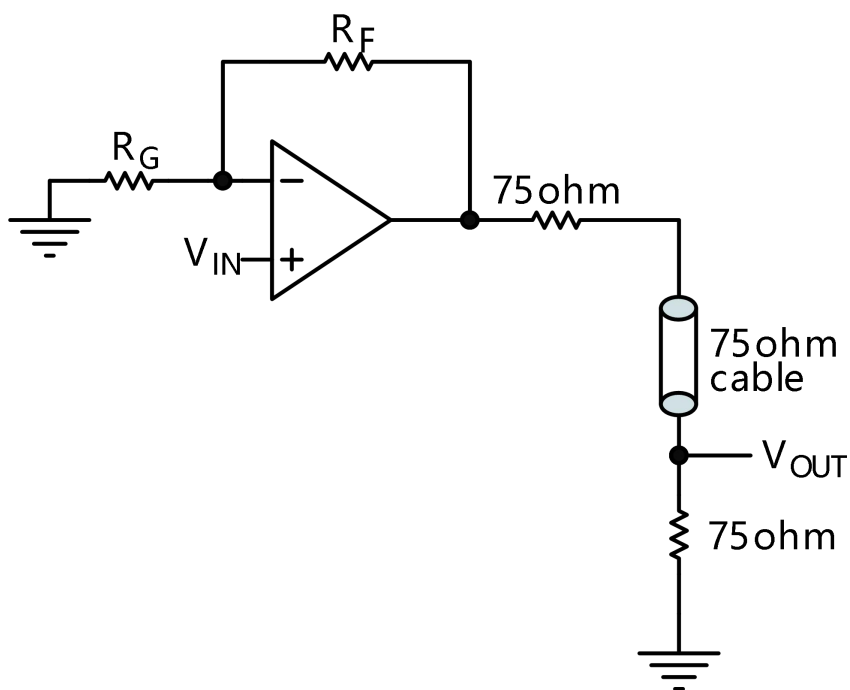


Figure 6. Typical video driving


Package Outline Dimensions

SOT23-5

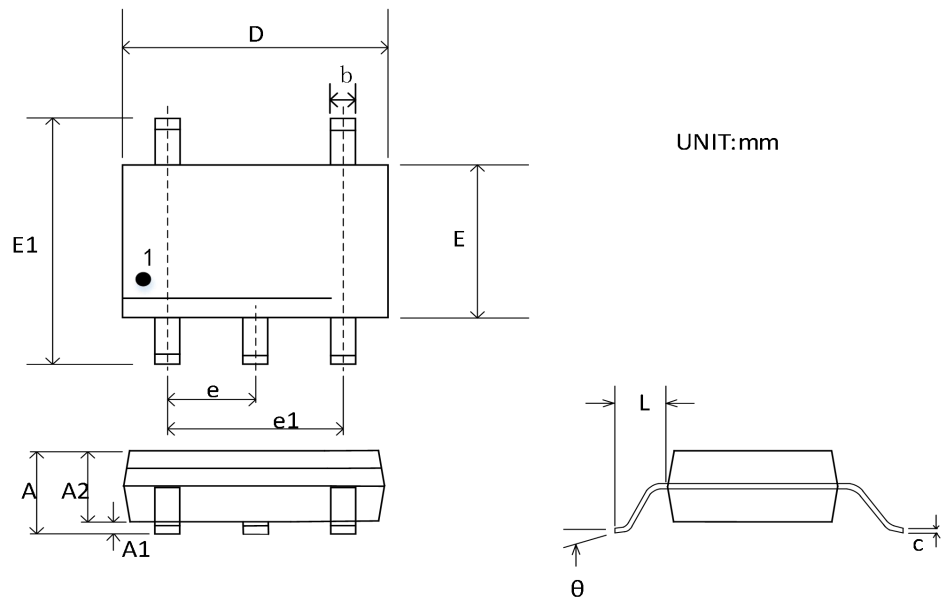


Symbol	Dimensions In Millimeters	
	Min	Max
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°

SC70-5

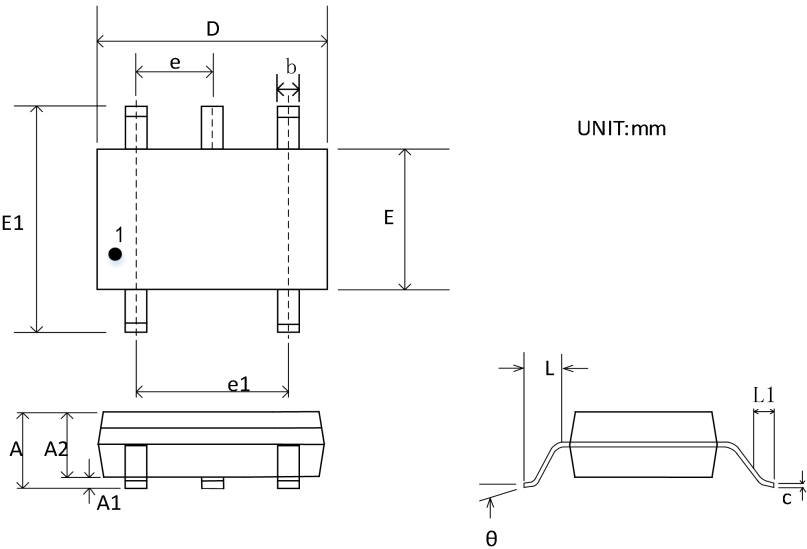


Symbol	Dimensions In Millimeters	
	Min	Max
A	0.900	1.100
A1	0.000	0.100
A2	0.900	1.000
b	0.150	0.350
C	0.080	0.150
D	2.000	2.200
E	1.150	1.350
E1	2.150	2.450
e	0.650 TYP	
e1	1.200	1.400
L	0.525 REF	
L1	0.260	0.460
θ	0°	8°

SOT23-6

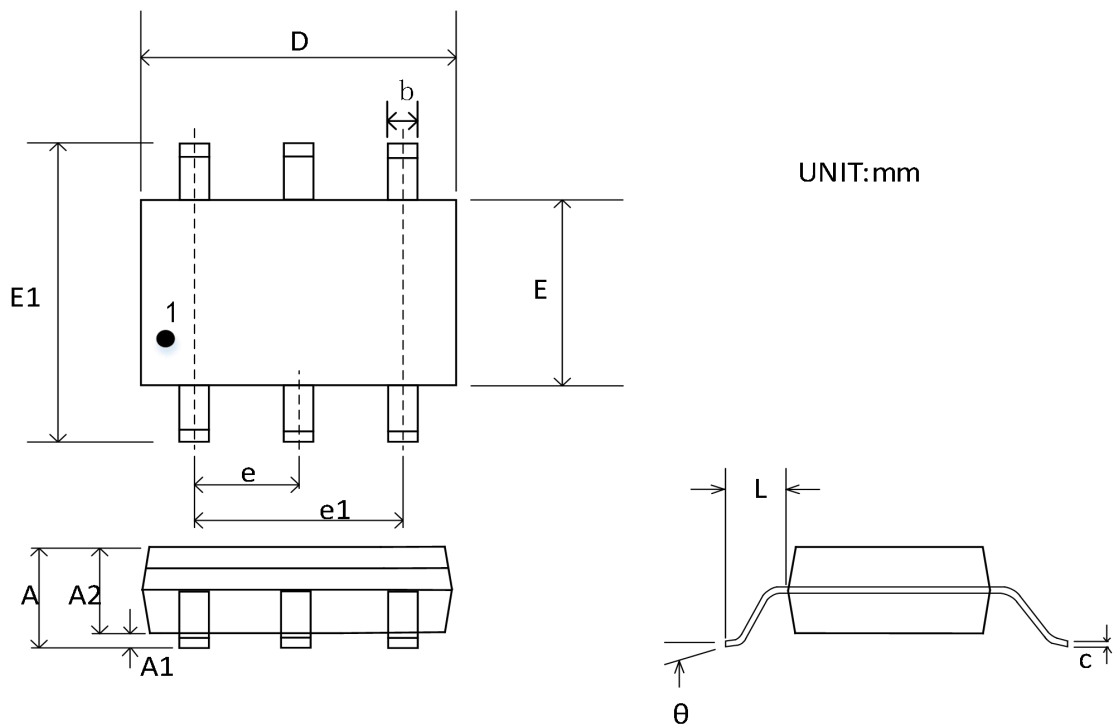


Symbol	Dimensions In Millimeters	
	Min	Max
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
C	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950 BSC	
e1	1.900 BSC	0.075 BSC
L	0.300	
θ	0°	8°

SC70-6

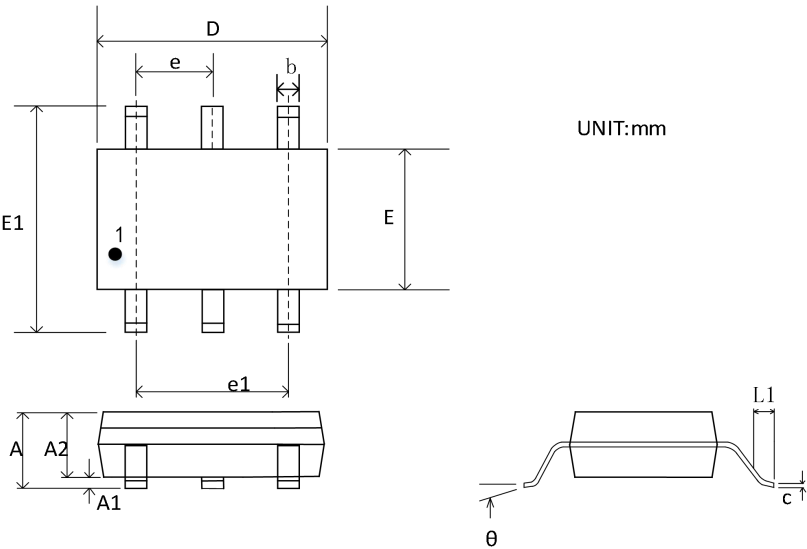


Symbol	Dimensions In Millimeters	
	Min	Max
A	0.800	1.100
A1	0.000	0.100
A2	0.700	1.000
b	0.150	0.300
C	0.150BSC	
D	1.850	2.150
E	1.100	1.400
E1	1.800	2.400
e	0.650 TYP	
e1	1.200	1.400
L1	0.260	0.460
θ	0°	8°

MSOP-8

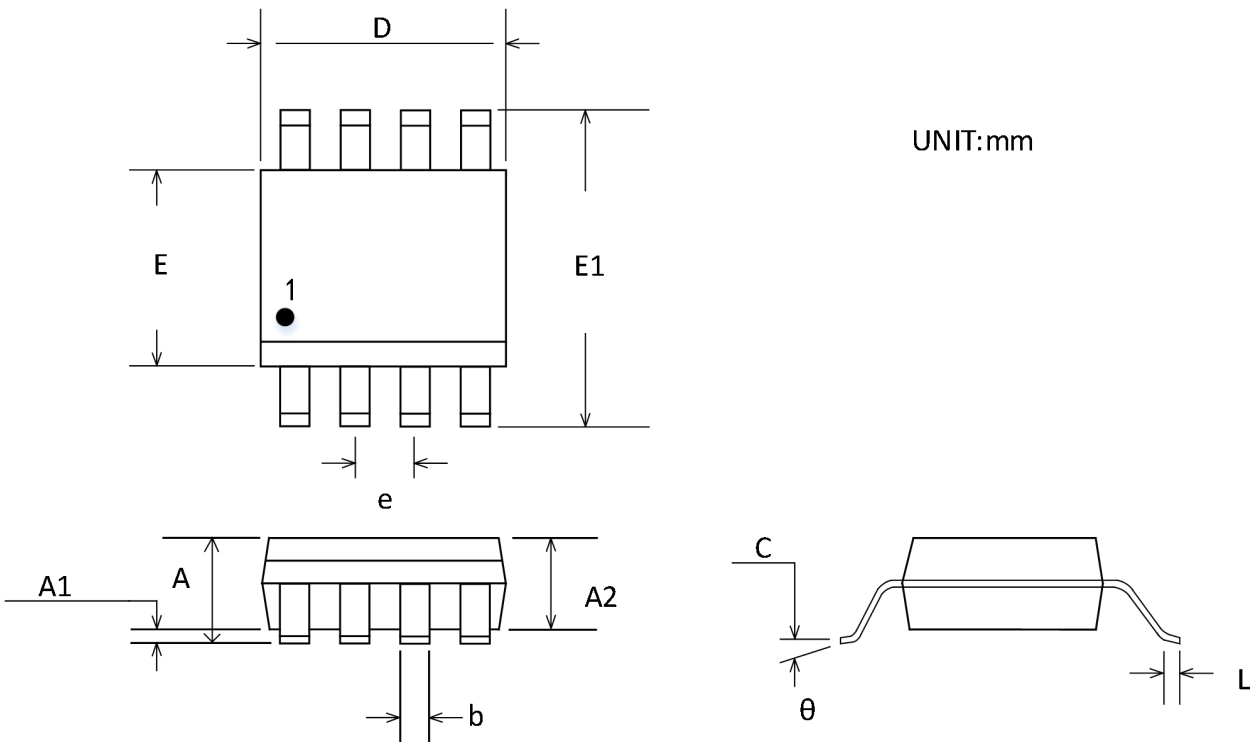


Symbol	Dimensions In Millimeters	
	Min	Max
A	0.820	1.100
A1	0.020	0.150
A2	0.750	0.950
b	0.250	0.380
c	0.090	0.230
D	2.900	3.100
E	2.900	3.100
E1	4.750	5.050
e	0.650 BSC	
L	0.400	0.800
θ	0°	6°

SOP-8

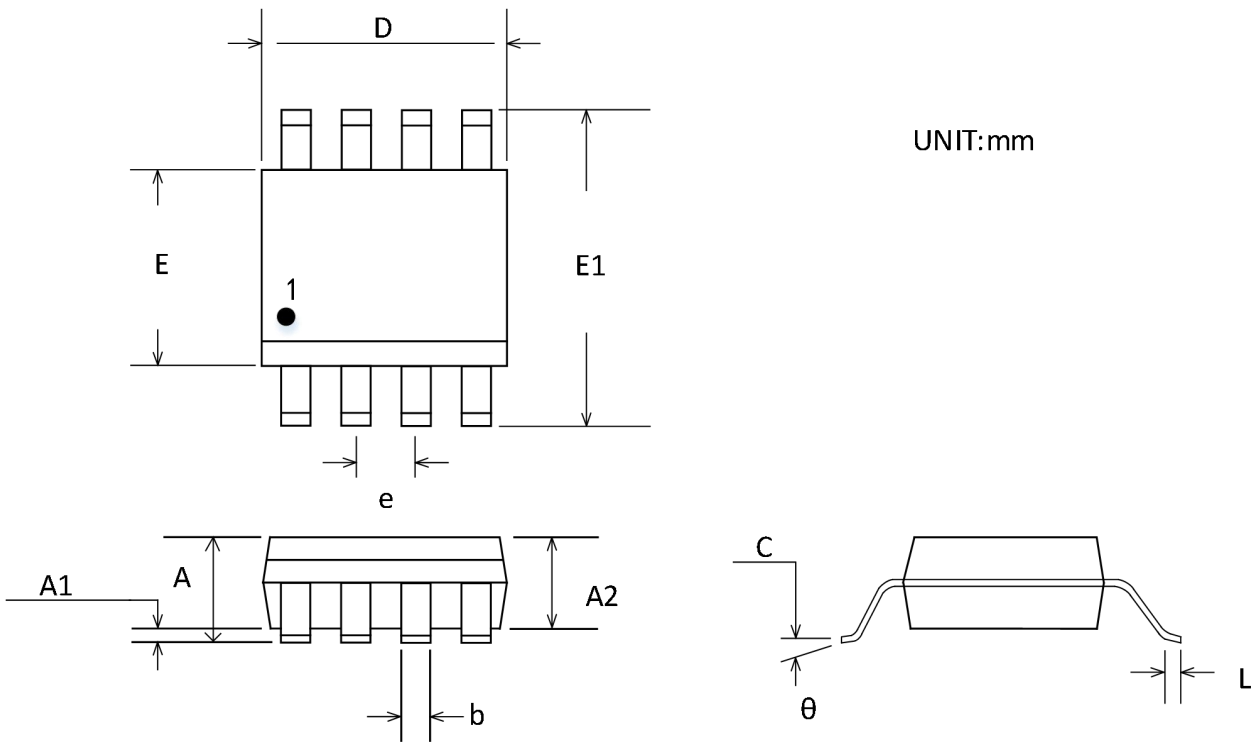


Symbol	Dimensions In Millimeters	
	Min	Max
A	1.350	1.750
A1	0.100	0.250
A2	1.350	1.550
b	0.330	0.510
c	0.170	0.250
D	4.800	5.000
E	3.800	4.000
E1	5.800	6.200
e	1.270 BSC	
L	0.400	1.270
θ	0°	8°

MSOP-10

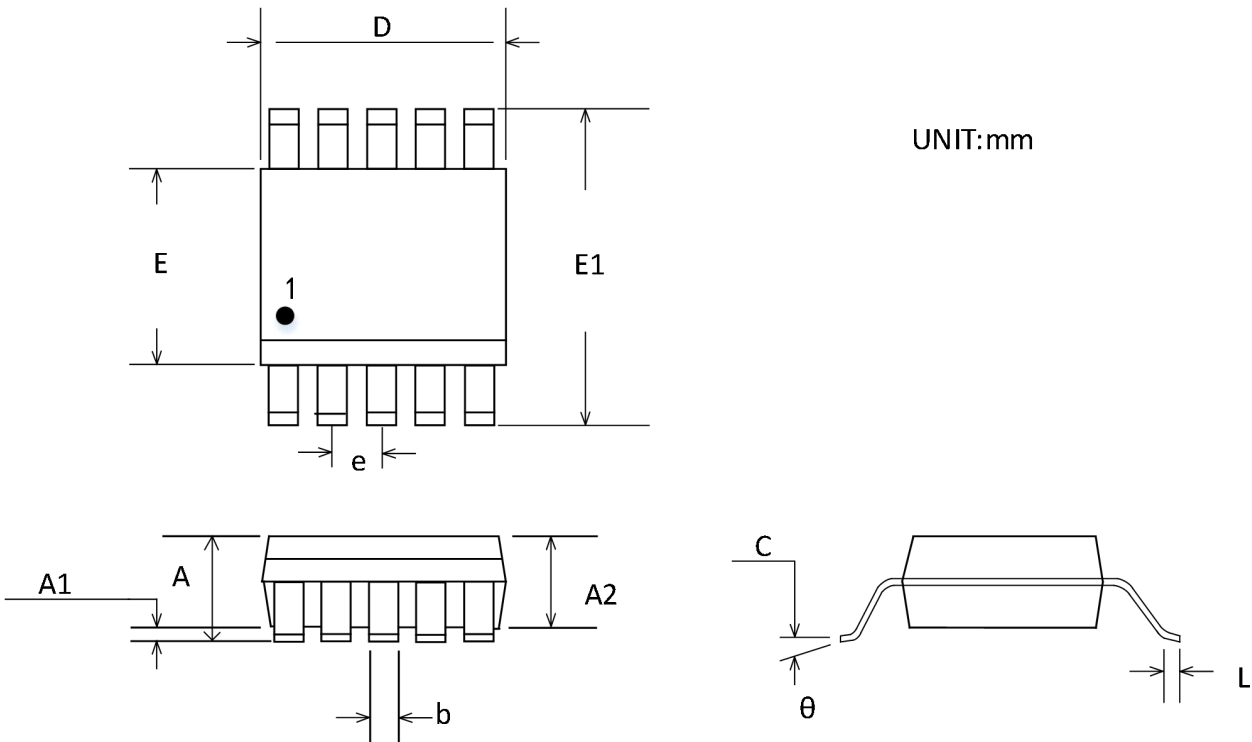


Symbol	Dimensions In Millimeters	
	Min	Max
A	0.820	1.100
A1	0.020	0.150
A2	0.750	0.950
b	0.180	0.280
c	0.090	0.230
D	2.900	3.100
E	2.900	3.100
E1	4.750	5.050
e	0.50 BSC	
L	0.400	0.800
θ	0°	6°

TSSOP-14

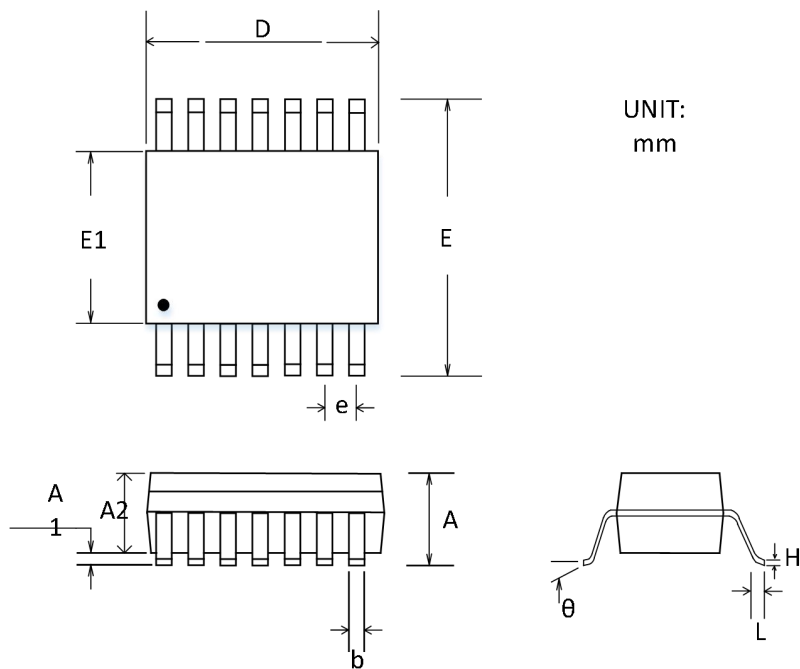

Symbol	Dimensions In Millimeters	
	Min	Max
A	1.20MAX	
A1	0.05	0.15
A2	0.80	1.05
b	0.19	0.30
D	4.90	5.10
E	6.40BSC	
E1	4.30	4.50
e	0.65BSC	
H	0.09	0.20
L	0.45	0.75
θ	0°	8°

SOP-14

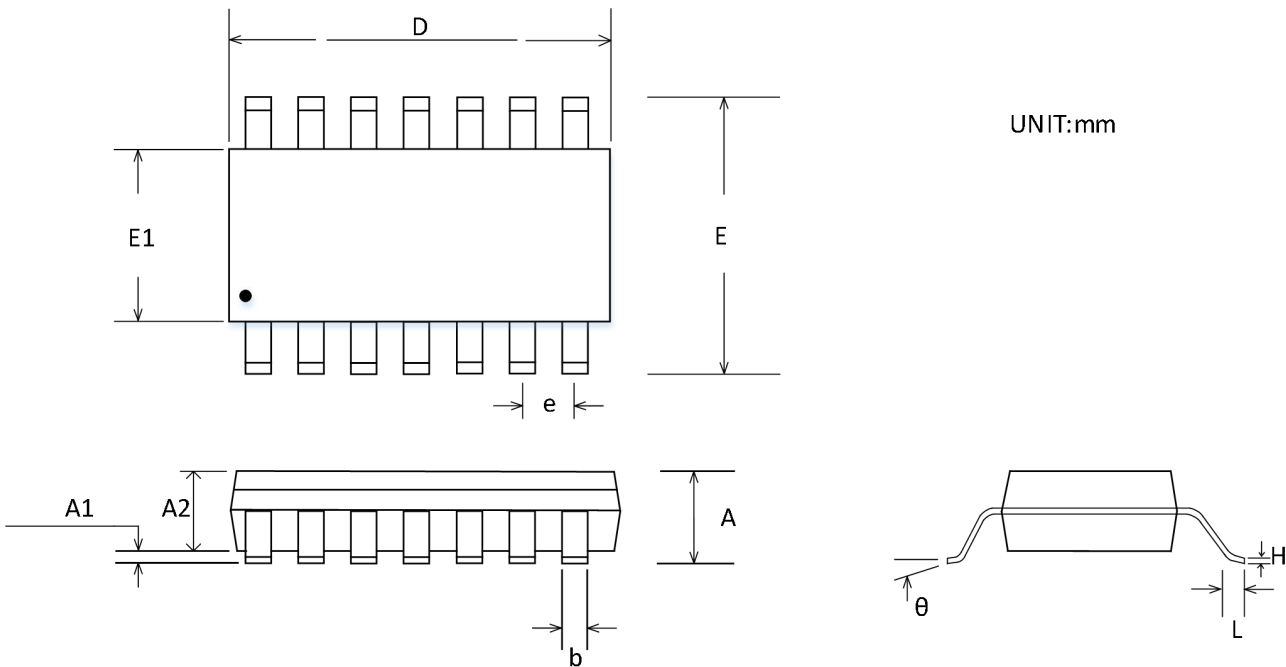

Symbol	Dimensions In Millimeters	
	Min	Max
A	1.35	1.75
A1	0.10	0.25
A2	1.25	1.50
b	0.31	0.51
D	8.55	8.75
E	5.80	6.20
E1	3.80	4.00
e	1.27BSC	
H	0.17	0.25
L	0.40	1.27
θ	0°	8°

Package/Ordering Information

MODEL	TEMPERATURE	PACKAGE DESCRIPTION	PACKAGE OPTION
CD8091ASC5	-40°C~125°C	SC70-5	Tape and Reel,3000
CD8091AST5	-40°C~125°C	SOT23-5	Tape and Reel, 3000
CD8091NSC6	-40°C~125°C	SC70-6	Tape and Reel, 3000
CD8091NST6	-40°C~125°C	SOT23-6	Tape and Reel, 3000
CD8092AS8	-40°C~125°C	SOP-8	Tape and Reel, 2500
CD8092AS8-RL	-40°C~125°C	SOP-8	Tape and Reel, 3000
CD8092AS8-REEL	-40°C~125°C	SOP-8	Tape and Reel, 4000
CD8092AMS8	-40°C~125°C	MSOP-8	Tape and Reel, 3000
CD8092NMS10	-40°C~125°C	MSOP-10	Tape and Reel, 3000
CD8094ATS14	-40°C~125°C	TSSOP-14	Tape and Reel, 2500
CD8094ATS14-RL	-40°C~125°C	TSSOP-14	Tape and Reel, 3000
CD8094ATS14-REEL	-40°C~125°C	TSSOP-14	Tape and Reel, 4000
CD8094AS14	-40°C~125°C	SOP-14	Tape and Reel, 2500
CD8094AS14-RL	-40°C~125°C	SOP-14	Tape and Reel, 3000
CD8094AS14-REEL	-40°C~125°C	SOP-14	Tape and Reel, 4000

Revision Log

Version	Revision date	Change content	Reason for Change	Modified by	Reviewed By	Note
V1.0	2025.5.26	Initial version	Regular update	WW	LYL	