



CD3485

3V-Powered, 10Mbps and Slew-Rate-Limited True RS-485/RS-422 Transceivers

Version: Rev 1.0.0 Date: 2025-6-25

Features ■■

- Low Quiescent Current: 300 μ A
- -7V to +12V Common-Mode Input Voltage Range
- Three-State Outputs
- 80ns Propagation Delays, 5ns Skew
- Half-Duplex Versions Available
- Operate from a Single 3.3V Supply
- Allows up to 32 Transceivers on the Bus
- Data rate: 10 Mbps
- Current-Limiting and Thermal Shutdown for
- Enhanced ESD Specifications:
- ± 15 kV IEC61000-4-2 Air Discharge
- ± 8 kV IEC61000-4-2 Contact Discharge

Application ■■

- Low-Power RS-485/RS-422 Transceivers
- Transceivers for EMI-Sensitive Applications
- Industrial-Control Local Area Networks

Description ■■


The CD3485 is low-power transceivers for RS-485 and RS-422 communication. IC contains one driver and one receiver. The driver slew rates of the CD3485 is not limited, allowing them to transmit up to 10Mbps.

These transceivers draw between 120 μ A and 500 μ A of supply current when unloaded or fully loaded with disabled drivers. All parts operate from a single 3.3V supply. Drivers are short-circuit current limited and are protected against excessive power dissipation by thermal shutdown circuitry that places the driver outputs into a high-impedance state. The receiver input has a fail-safe feature that guarantees a logic-high output if the input is open circuit.

Contents

Features	- 1 -
Application	- 1 -
Description	- 1 -
Pin Configurations	- 3 -
Absolute Maximum Ratings	- 3 -
Electrical Characteristics	- 4 -
Switching Characteristics	- 5 -
Test Circuits	- 6 -
Function Tables	- 9 -
Typical Information	- 9 -
Driver Output Protection	- 9 -
Propagation Delay	- 10 -
Typical Applications	- 10 -
Package Outline Dimensions	- 11 -
DIP-8	- 11 -
SOP-8	- 12 -
Package/Ordering Information	- 13 -
Revision Log	- 14 -

Pin Configurations

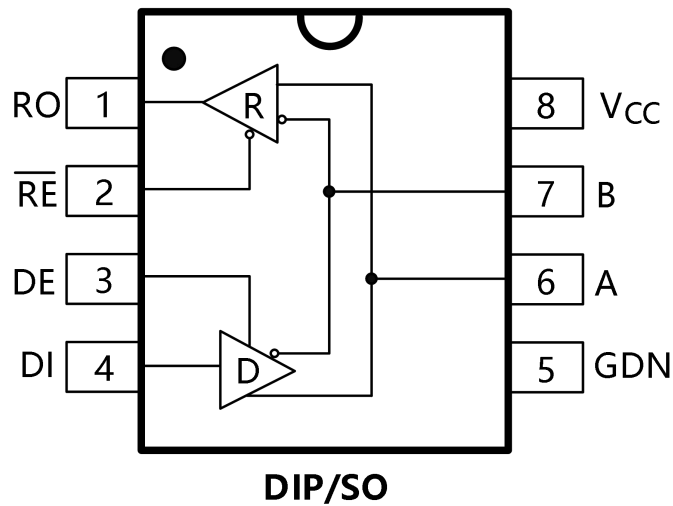

Absolute Maximum Ratings

Parameter	Value	Unit
Supply Voltage (VCC)	7	V
Control Input Voltage	-0.3V to 7V	V
Driver Input Voltage (DI)	0.3 to-7V	V
Driver Output Voltage (A, B)	-7.5V to+12.5V	V
Receiver Input Voltage (A, B)	-7.5V to+12.5V	V
Receiver Output Voltage (RO)	-0.3V to(VCC+0.3V)	V
8-Pin Plastic DIP (derate 9.09mW/°C above+70°C)	727	mW
8-Pin SOP (derate 5.88mW/°C above +70°C))	471	mW
Operating Temperature Ranges	-40 to 125	°C
Storage Temperature Range	-65 to 160	°C
Lead Temperature (soldering, 10sec)	+300	°C

Electrical Characteristics

($V_{CC} = 3.3V \pm 0.3V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Differential Driver Output (no load)	V_{OD1}				3	V
Differential Driver Output (with load)	V_{OD2}	$R = 100\Omega$ (RS-422)	1			V
		$R = 54\Omega$ (RS-485), Figure 4	0.8			
Change in Magnitude of Driver Differential Output Voltage for Complementary Output States	ΔV_{OD}	$R = 54\Omega$ or 50Ω , Figure 4			0.2	V
Driver Common-Mode Output Voltage	V_{OC}	$R = 54\Omega$ or 100Ω , Figure 4			2	V
Change in Magnitude of Driver Common-Mode Output Voltage for Complementary Output States	ΔV_{OC}	$R = 54\Omega$ or 100Ω , Figure 4			0.2	V
Input High Voltage	V_{IH}	DE, DI, RE	2.0			V
Input Low Voltage	V_{IL}	DE, DI, RE			0.8	V
Input Current	I_{IN1}	DE, DI, RE			± 2	μA
Input Current (A, B)	I_{IN2}	DE = 0V ; $V_{CC}=0V$ or 3.35V;	$V_{IN}=12V$		1.0	mA
			$V_{IN}=-7V$		-0.8	
Receiver Differential Threshold Voltage	V_{TH}	$-7V \leq V_{CM} \leq 12V$	-0.2		0.2	V
Receiver Input Hysteresis	ΔV_{TH}	$V_{CM} = 0V$		70		mV
Receiver Output High Voltage	V_{OH}	$I_O = -1.5mA$, $V_{ID} = 200mV$	2.5			V
Receiver Output Low Voltage	V_{OL}	$I_O = 2.5mA$, $V_{ID} = -200mV$			0.4	V
Three-State (high impedance) Output Current at Receiver	I_{OZR}	$0.4V \leq V_O \leq 2.4V$			± 1	μA
Receiver Input Resistance	R_{IN}	$-7V \leq V_{CM} \leq 12V$	12			k Ω
No-Load Supply Current (Note 3)	I_{CC}	DE = V_{CC}		500	800	μA
		RE = 0V or V_{CC}		300	400	
		DE = 0V				
Driver Short-Circuit Current,	I_{OSD1}	$-7V \leq V_O \leq 12V$ (Note 4)			250	mA

VO = High Driver Short-Circuit Current	I_{OSD2}	$-7V \leq V_O \leq 12V$ (Note 4)			250	mA
VO = Low Receiver Short-Circuit Current	I_{OSR}	$0V \leq V_O \leq V_{CC}$	± 6.5		95	mA
ESD Protection		A, B, Y and Z pins, tested using Human Body Model		± 15		kV

Switching Characteristics

($V_{CC} = 3.3V \pm 0.3V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.) (Notes 1, 2)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Driver Input to Output	T_{PLH}	$R_{DIFF} = 54\Omega$	10	80	100	ns
	T_{PHL}	$C_{L1} = C_{L2} = 100pF$	10	80	100	
Driver Output Skew to Output	T_{SKEW}	$R_{DIFF} = 54\Omega, C_{L1} = C_{L2} = 100pF$		5	10	ns
Driver Enable to Output High	T_{ZH}	$C_L = 100pF$, S2 closed		55	80	ns
Driver Enable to Output Low	T_{ZL}	$C_L = 100pF$, S1 closed		55	80	ns
Driver Disable Time from Low	T_{LZ}	$C_L = 15pF$, S1 closed		60	90	ns
Driver Disable Time from High	T_{HZ}	$C_L = 15pF$, S2 closed		60	90	ns
$ T_{PLH} - T_{PHL} $ Differential	T_{SKD}	$R_{DIFF} = 54\Omega$		13	20	ns
Receiver Input to Output	T_{PLH}	$R_{DIFF} = 54\Omega$	20	120	200	ns
	T_{PHL}	$C_{L1} = C_{L2} = 100pF$	20	120	200	
Receiver Skew $ T_{PLH} - T_{PHL} $		$C_{L1} = C_{L2} = 100pF$		5	10	
Receiver Enable to Output Low	T_{ZL}	$C_{RL} = 15pF$, S1 closed		50	90	ns
Receiver Enable to Output High	T_{ZH}	$C_{RL} = 15pF$, S2 closed		50	90	ns
Receiver Disable Time from Low	T_{LZ}	$C_{RL} = 15pF$, S1 closed		40	80	ns
Receiver Disable Time from High	T_{HZ}	$C_{RL} = 15pF$, S2 closed		40	80	ns
Maximum Data Rate	F_{MAX}				10	Mbps

Note 1: All currents into device pins are positive; all currents out of device pins are negative. All voltages are referenced to device ground unless otherwise specified.

Note 2: All typical specifications are given for $V_{CC}=3.3V$ and $T_A=+25^\circ C$.

Note 3: Supply current specification is valid for loaded transmitters when $DE=0V$.

Note 4: Applies to peak current.

Test Circuits

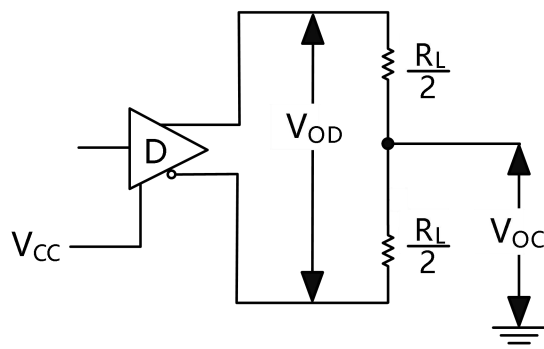


Figure 1. Driver V_{OD} and V_{OC}

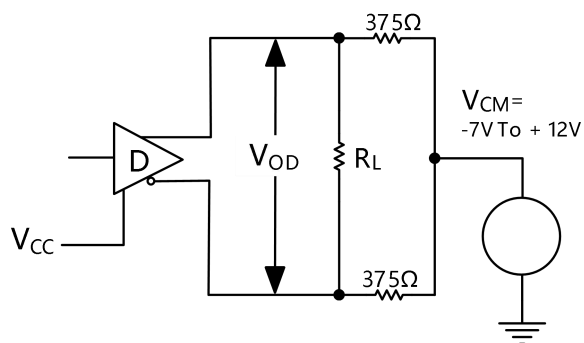


Figure 2. Driver V_{OD} with Varying Common-Mode Voltage

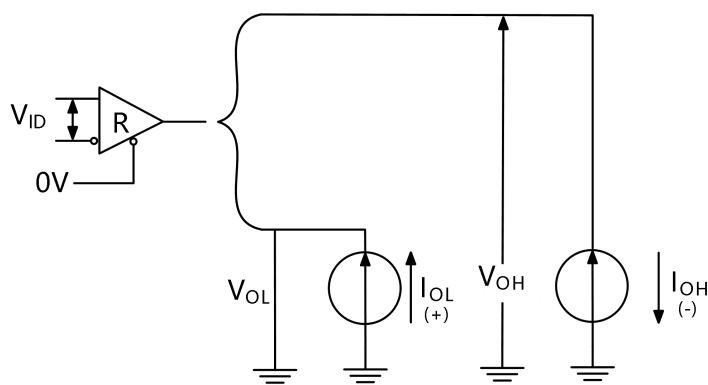


Figure 3. Receiver V_{OH} and V_{OL}

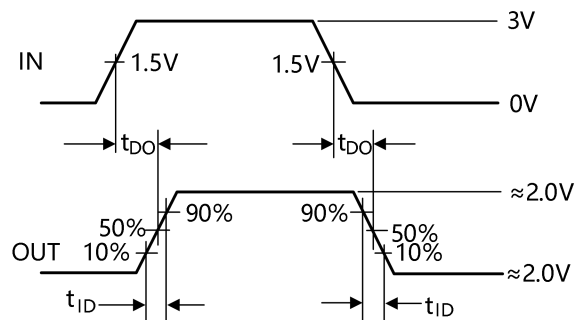
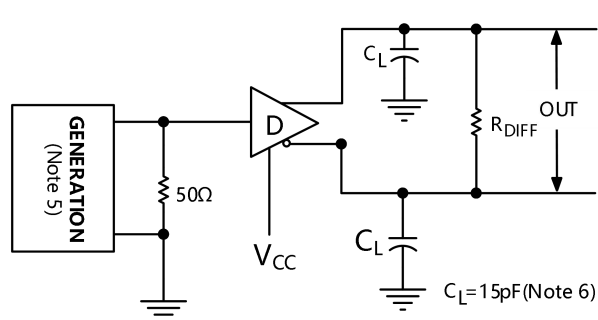


Figure 4. Driver Differential Output Delay and Transition Times

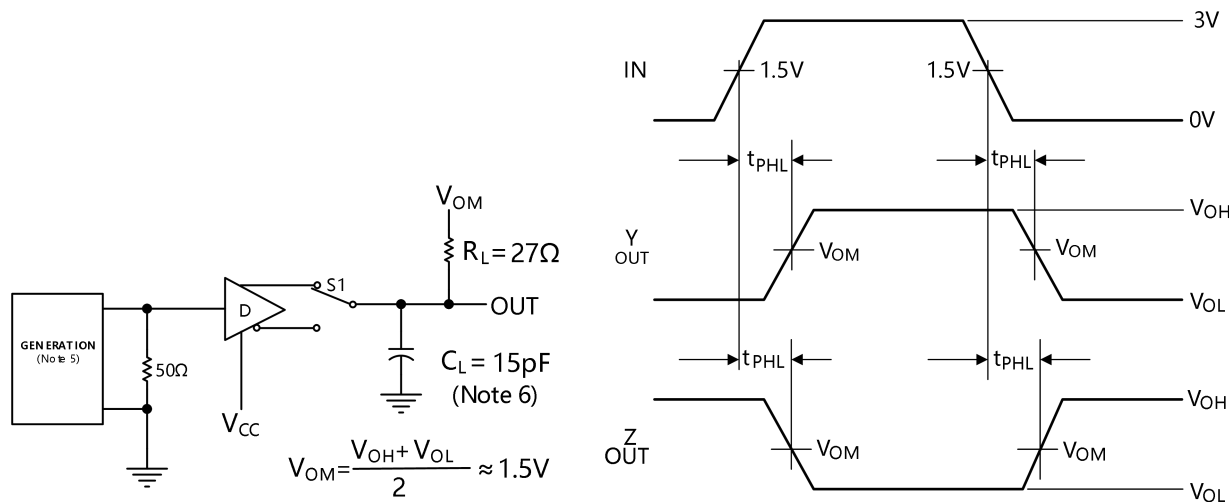


Figure 5. Driver Propagation Times

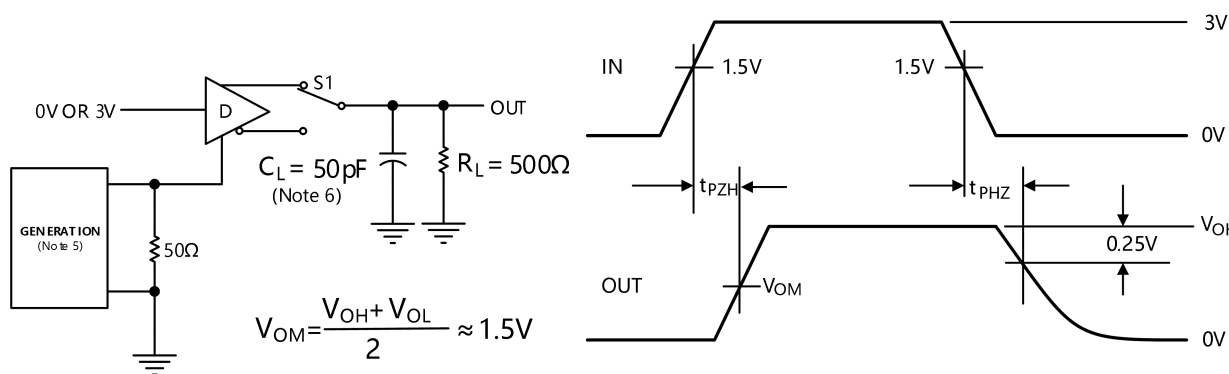


Figure 6. Driver Enable and Disable Times (T_{PZH} , T_{PSH} , T_{PHZ})

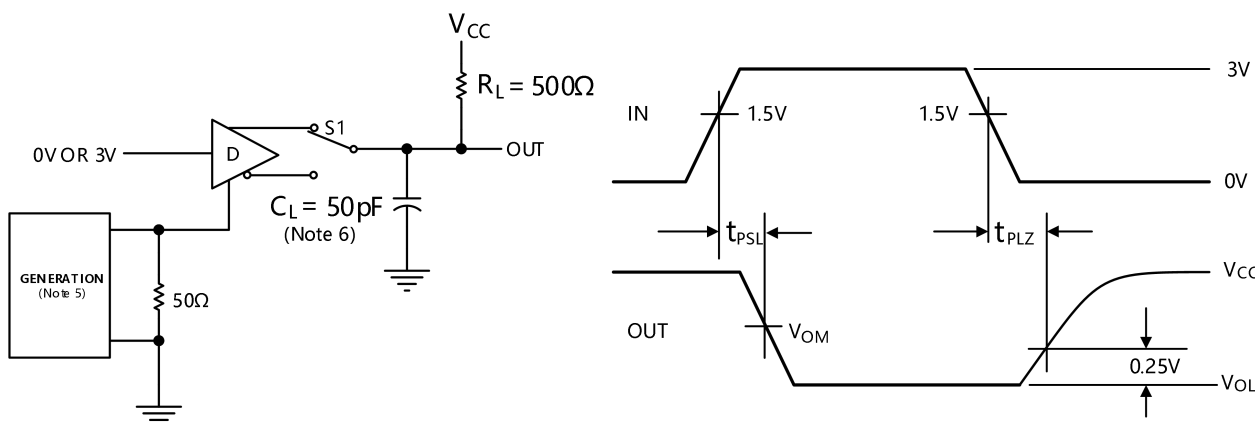


Figure 7. Driver Enable and Disable Times (T_{PZH} , T_{PSH} , T_{PHZ})

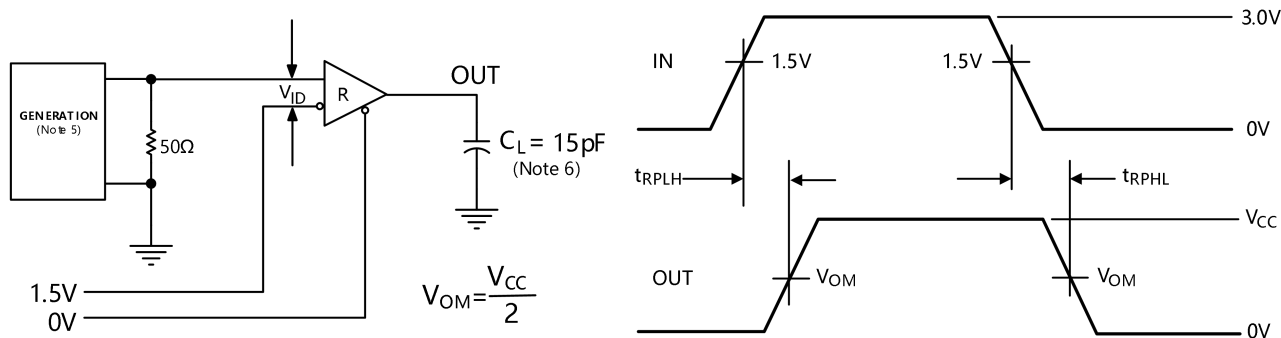


Figure 8. Driver Enable and Disable Times (T_{PZH} , T_{PSH} , T_{PHZ})

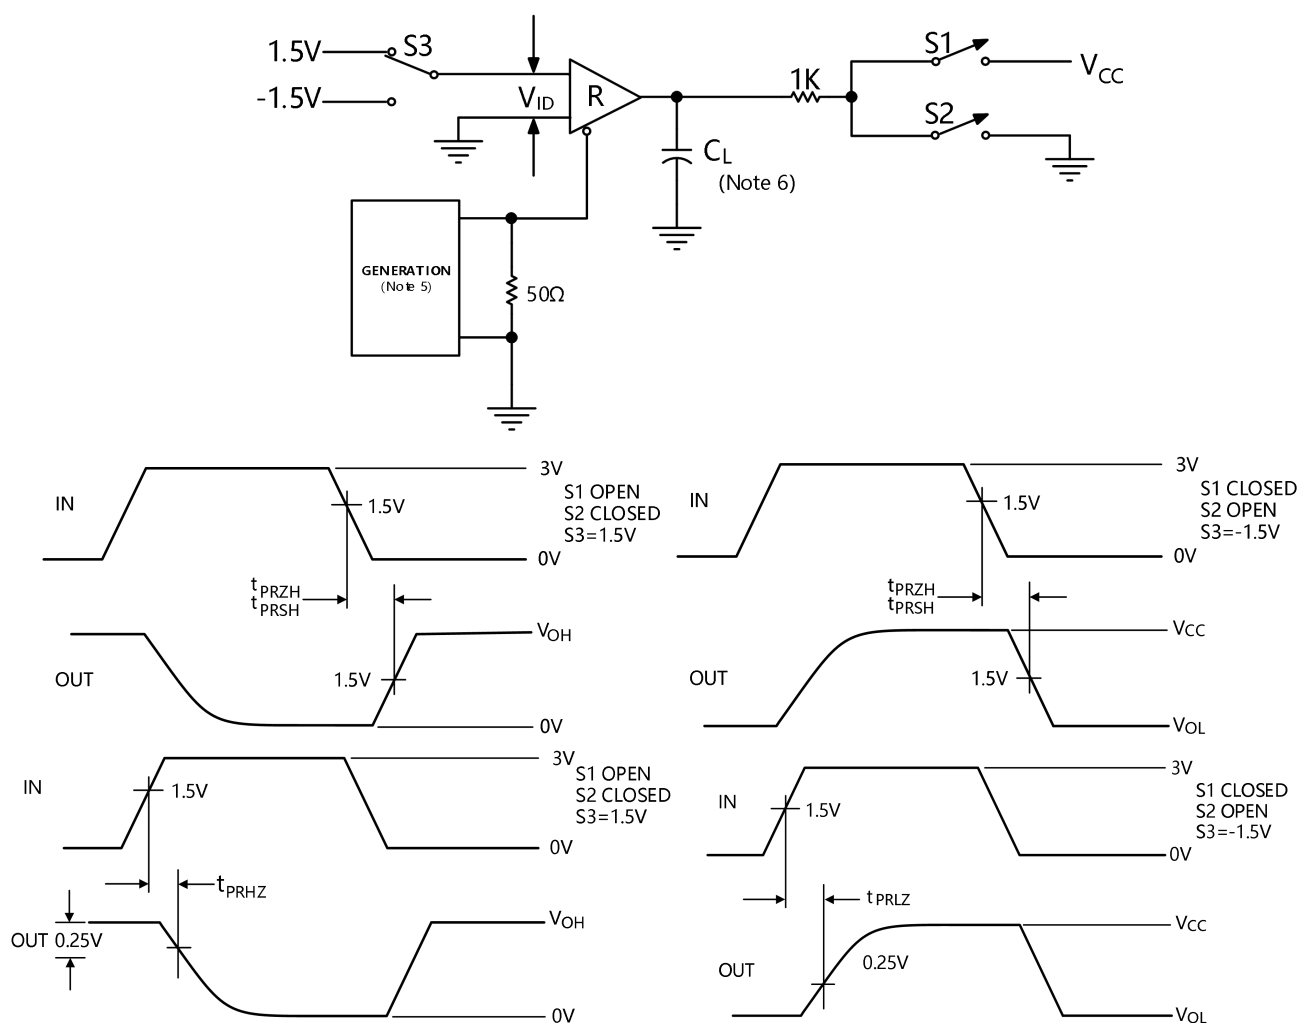


Figure 9. Driver Enable and Disable Times (T_{PZH} , T_{PSH} , T_{PHZ})

Note 5: The input pulse is supplied by a generator with the following characteristics: PRR = 250kHz, 50% duty cycle, $t_r \leq 6.0\text{ns}$, $Z_O = 50\Omega$.

Note 6: C_L includes probe and stray capacitance.

Function Tables

Transmitting				
INPUTS			OUTPUTS X	
RE	DE	DI	Z	Y
X	1	1	0	1
X	1	0	1	0
0	0	X	Z	Z
1	0	X	Z	Z

Receiving			
INPUTS			OUTPUTS
RE	DE	A-B	RO
0	0	+0.2V	1
0	0	-0.2V	0
0	0	open	1
1	0	X	Z

X-don' t care

Z-high impedance

Typical Information

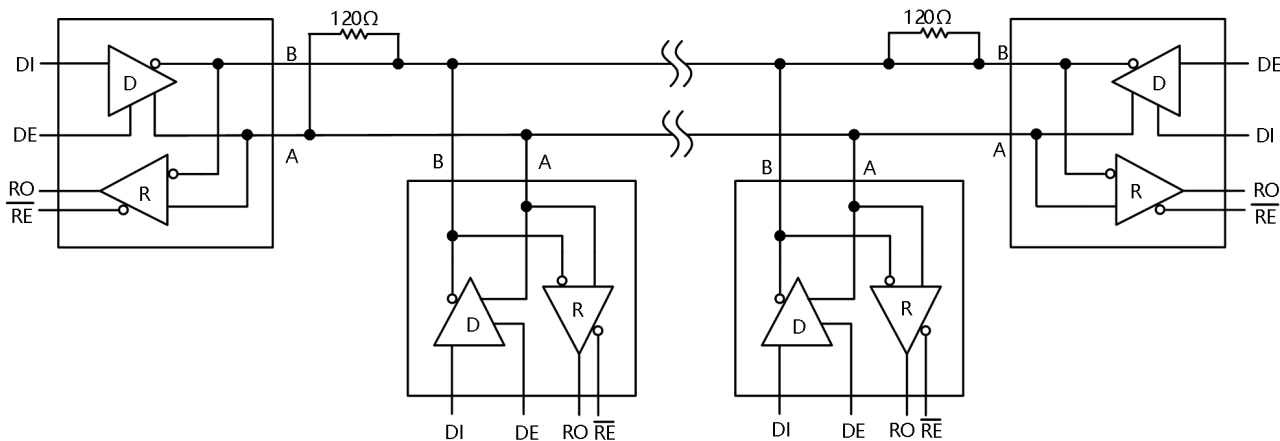


Figure 10. CD3485 Typical RS-485 Network

Driver Output Protection

Excessive output current and power dissipation caused by faults or by bus contention are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits over the whole common-mode voltage range. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state if the die temperature rises excessively.

Propagation Delay

Skew time is simply the difference between the low-to-high and high-to-low propagation delay. Small driver/receiver skew times help maintain a symmetrical mark-space ratio (50% duty cycle). The receiver skew time, $|TPRLH - TPRHL|$, is under 10ns. The driver skew times are 5ns for the CD3485.


Typical Applications

CD3485 transceivers are designed for bidirectional data communications on multipoint bus transmission lines. Figure 10 shows typical network applications circuits. These parts can also be used as line repeaters, with cable lengths longer than 4000 feet.

To minimize reflections, the line should be terminated at both ends in its characteristic impedance, and stub lengths off the main line should be kept as short as possible.

Package Outline Dimensions


DIP-8

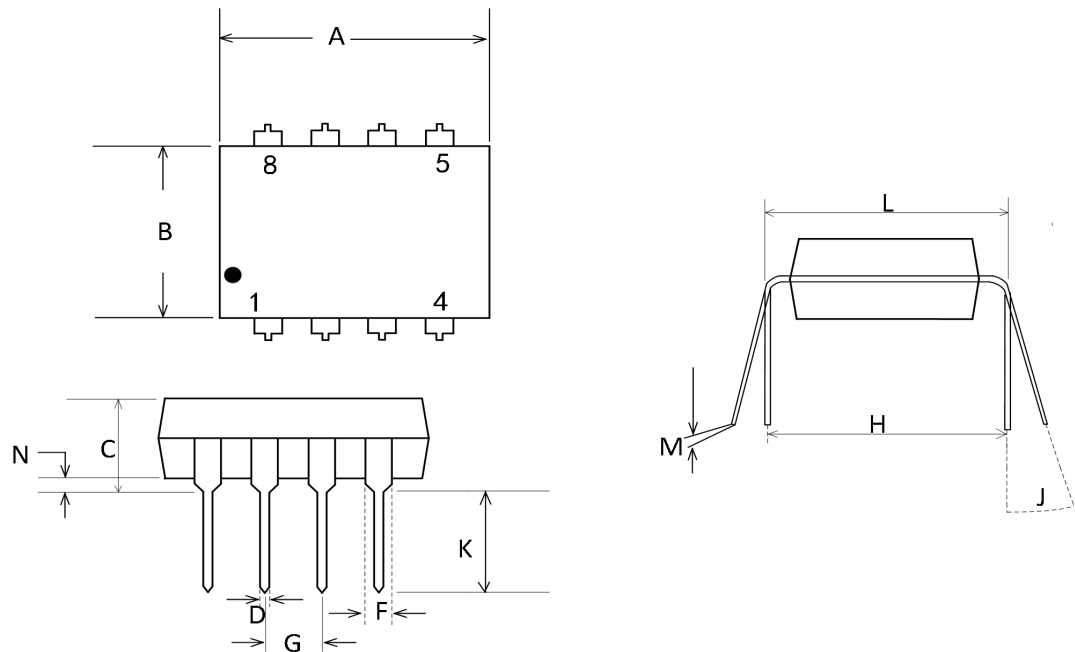

NOTES: 1. Dimensions "A" , "B" do not include mold flash or protrusions.
Maximum mold flash or protrusions 0.25 mm (0.010) per side.

Symbol	Dimensions , mm	
	Min	Max
A	8.51	10.16
B	6.1	7.11
C		5.33
D	0.36	0.56
F	1.14	1.78
G	2.54	
H	7.62	
J	0°	10°
K	2.92	3.81
L	7.62	8.26
M	0.2	0.36
N	0.38	

SOP-8

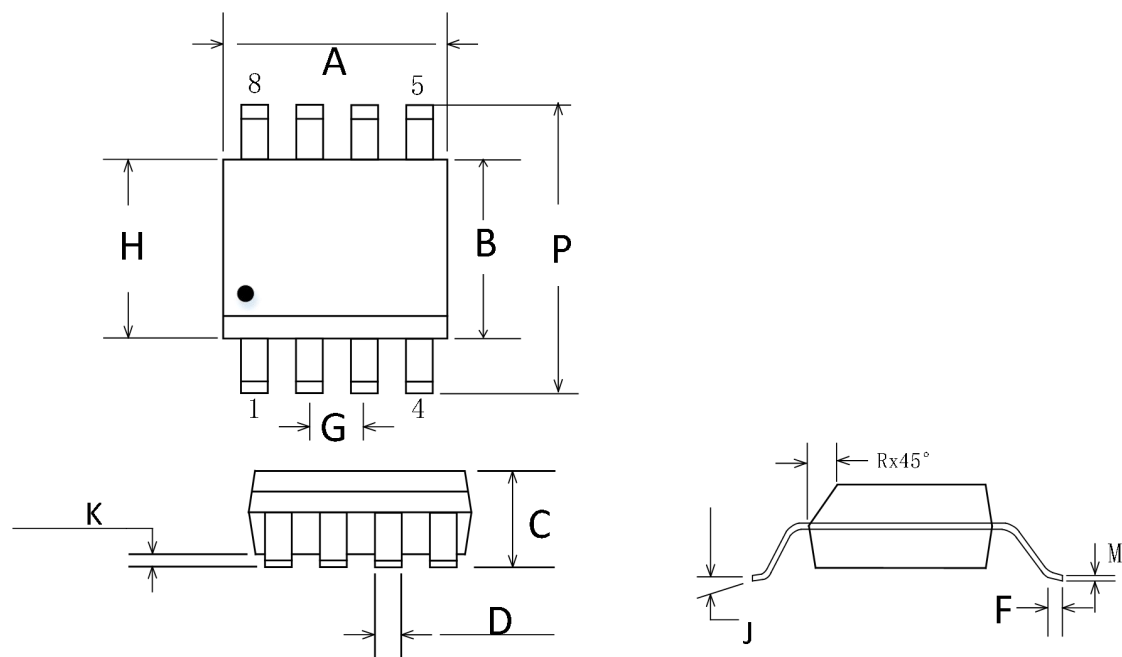

NOTES: 1. Dimensions A and B do not include mold flash or protrusion.
2. Maximum mold flash or protrusion 0.15 mm (0.006) per side for A; for B - 0.25 mm (0.010) per side.

Symbol	Dimensions ,mm	
	Min	Max
A	4.8	5
B	3.8	4
C	1.35	1.75
D	0.33	0.51
F	0.4	1.27
G	1.27	
H	5.72	
J	0°	3°
K	0.1	0.25
M	0.19	0.25
P	5.8	6.2
R	0.25	0.5

Package/Ordering Information

MODEL	TEMPERATURE	PACKAGE DESCRIPTION	PACKAGE OPTION
CD3485AS8	-40°C~125°C	SOIC-8(SOP8)	Tape and Reel, 2500
CD3485AS8-RL	-40°C~125°C	SOIC-8(SOP8)	Tape and Reel, 3000
CD3485AS8-REEL	-40°C~125°C	SOIC-8(SOP8)	Tape and Reel, 4000

Revision Log

Version	Revision date	Change content	Reason for Change	Modified by	Reviewed By	Note
V1.0	2025.6.25	Initial version	Regular update	WW	LYL	