



CD317

Low Dropout Linear Regulator (LDO)

Version: Rev 1.0.0 Date: 2025-6-12

Features ■■

- Output Current in Excess of 1.5 Ampere
- Output Adjustable between 1.2 V and 37 V
- Internal Thermal Overload Protection
- Internal Short - Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- Floating Operation for High Voltage
- Standard 3-lead Transistor Packages
- Eliminates Stocking Many Fixed

Application ■■

- Post regulation for switching supplies
- Constant-current regulator
- Microprocessor supplies
- Automotive LED lighting
- Battery chargers

Description ■■

The CD317 is adjustable 3-terminal positive voltage regulator capable of supplying in excess of 1.5 A over an output voltage range of 1.25 V to 37 V. These voltage regulator is exceptionally easy to use and require only two external resistors to set the output voltage. Further, it employ internal current limiting, thermal shutdown and safe area compensation, making them essentially blow-out proof.

The CD317 serve a wide variety of applications to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the CD317 series can be used as a precision current regulator.

Contents

Features.....

- 1 -

Application.....

- 1 -

Description.....

- 1 -

Pin Configurations.....

- 3 -

Pin Description.....

- 3 -

Application Circuit.....

- 4 -

Absolute Maximum Ratings.....

- 4 -

Electrical characteristics.....

- 4 -

Typical Characteristics.....

- 6 -

Package Outline Dimensions.....

- 7 -

Package/Ordering Information.....

- 8 -

Revision Log.....

- 9 -

Pin Configurations

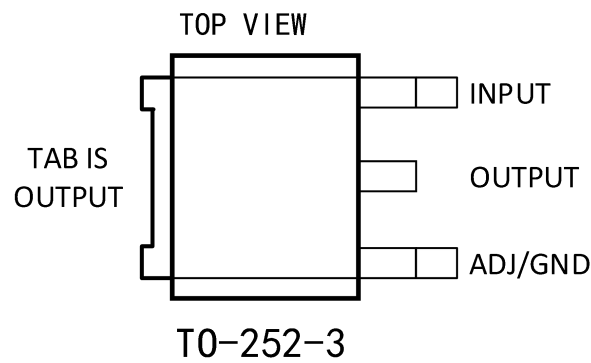


Figure 1. TO252-3 Pin Configuration

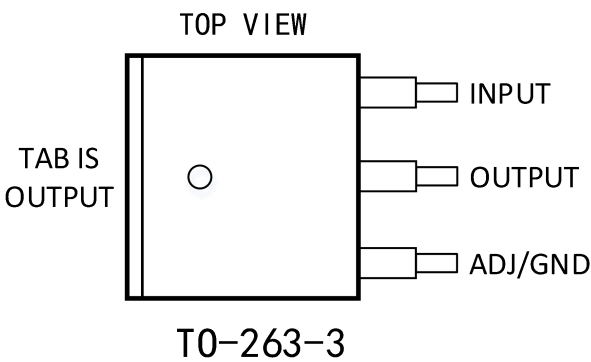


Figure 2. TO263-3 Pin Configuration

Pin Description

Num	Symbol	I/O	Description
1	ADJUST	I	Output voltage adjustment pin. Connect to a resistor divider to set VO
2	OUTPUT	O	Voltage output pin
3	INPUT	I	Supply input pin

Application Circuit

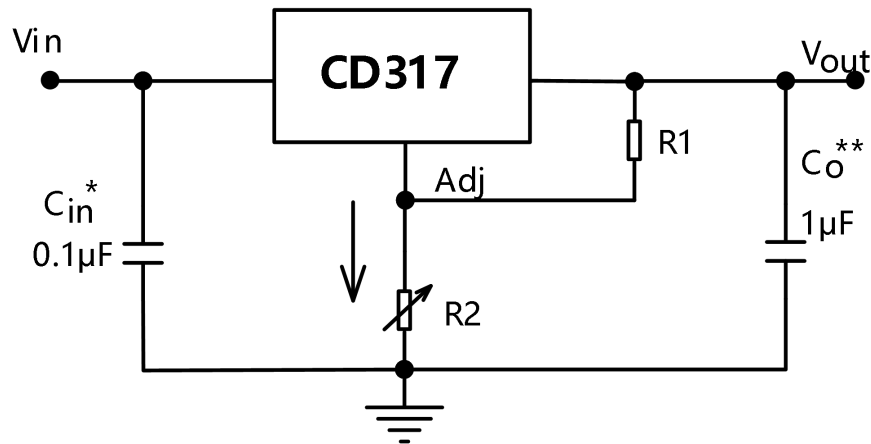


Figure 3. Application Circuit

*= Cin is required if regulator is located an appreciable distance from power supply filter.

**=Co is not needed for stability ; however, it does improve transient response.

$$V_{OUT} = 1.25V \left(1 + \frac{R2}{R1} \right) + I_{Adj} * R2$$

Absolute Maximum Ratings

Rating	Symbol	Value	Unit
Input - Output Voltage Differential	$V_I - V_O$	40	Vdc
Power Dissipation and Thermal Characteristics	PD	Internally Limited	
Operating Junction Temperature Rang	T_J	-40 to +150	°C
Storage Junction Temperature Rang	T_{STG}	-65 to +150	°C

Electrical characteristics

($V_I - V_O = 5.0V$, $I_O = 0.5A$, $T_J = T_{LOW}$ to T_{HIGH} (see Note 1); $I_{MAX} = 1.5A$ and $P_{MAX} = 20W$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Line Regulation ($T_A = +25^\circ C$, $3.0V \leq V_I - V_O \leq 40V$)	Regline	-	0.01	0.04	%/V
Load Regulation ($T_J = +25^\circ C$, $10mA \leq I_O \leq I_{MAX}$)	$V_{IN} \geq 5V$	-	5.0	25	mV
	$V_{IN} \leq 5V$	-	0.1	0.5	%/ V_O

Thermal Regulation ($T_A = +25^\circ\text{C}$) 20 ms Pulse		-	-	0.03	0.07	%/W
Adjustment Pin Current		I_{ADJ}	-	50	100	μA
Adjustment Pin Current Change $2.5 \leq V_I - V_O \leq 40\text{V}$ $10\text{mA} \leq I_L \leq I_{MAX}$, $P_D \leq P_{MAX}$		ΔI_{ADJ}	-	0.2	5.0	μA
Reference Voltage (Note 4) $3.0 \leq V_I - V_O \leq 40\text{V}$ $10\text{mA} \leq I_L \leq I_{MAX}$, $P_D \leq P_{MAX}$		V_{ref}	1.2	1.25	1.3	V
Line Regulation (Note 3) $3.0\text{V} \leq V_I - V_O \leq 40\text{V}$		Regline	-	0.02	0.07	%/V
Load Regulation (Note 3) $10\text{mA} \leq I_O \leq I_{MAX}$	$V_{IN} \geq 5\text{V}$	Regload	-	20	70	mV
	$V_{IN} \leq 5\text{V}$		-	0.3	1.5	%/V
Temperature Stability ($T_{LOW} \leq T_J \leq T_{TIGH}$)		T_S	-	0.7	-	
Minimum Load Current to Maintain Regulation ($V_I - V_O = 40\text{V}$)		$I_{L_{MIN}}$	-	3.5	10	mA
Maximum Output Current ($T_A = +25^\circ\text{C}$)	$V_I - V_O \leq 15\text{V}$, $P \leq 20\text{W}$	I_{MAX}	1.5	2.2	-	A
	$V_I - V_O = 40\text{V}$, $P \leq 20\text{W}$		0.15	0.4	-	
RMS Noise, % of V_O $T_A = +25^\circ\text{C}$, $10\text{Hz} \leq f \leq 10\text{kHz}$		N	-	0.003	-	%/ V_O
Ripple Rejection $V_O = 10\text{V}$, $f = 120\text{Hz}$ (Note 5)	Without C_{ADJ}	RR	- 66	65	-	dB
	$C_{ADJ} = 10\mu\text{F}$			80	-	
Long-Term Stability, $T_J = T_{HIGH}$ (Note 6) $T_A = +25^\circ\text{C}$ for Endpoint Measurements		S	-	0.3	1.0	%/1.0k Hrs.
Thermal Resistance Junction to Case		$R_{\theta JC}$	-	5.0	-	$^\circ\text{C}/\text{W}$

Notes:

- (1) $T_{LOW} = -40^\circ\text{C}$, $T_{HIGH} = +125^\circ\text{C}$
- (2) $I_{MAX} = 0.5\text{A}$, P_{MAX}
- (3) Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty cycle is used.
- (4) Selected devices with tightened tolerance reference voltage available.
- (5) C_{adj} , when used, connected between the adjustment pin and ground.
- (6) Since Long - Term Stability cannot be measured on each device before shipment, this specification is an engineering estimate of average stability from lot to lot.

Typical Characteristics

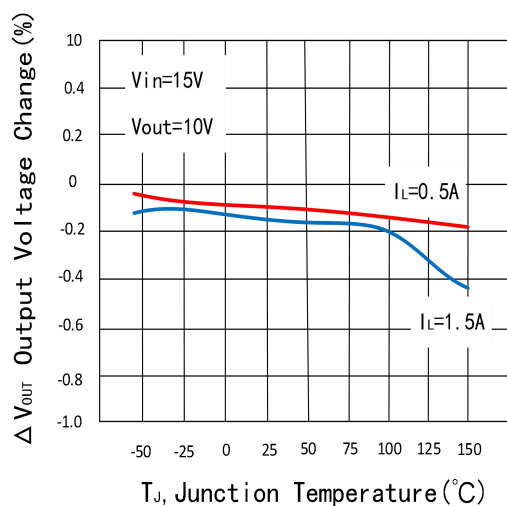


Figure 4. Load Regulation

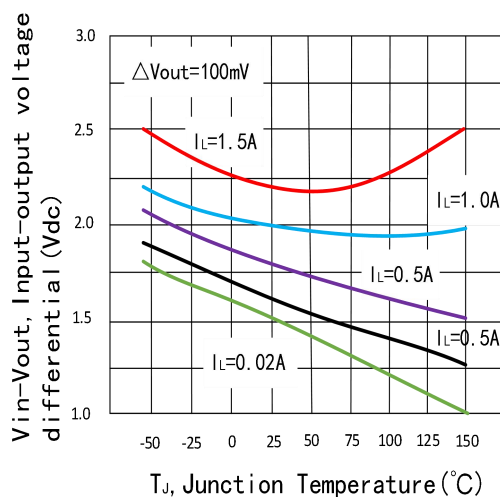


Figure 5. Dropout Voltage

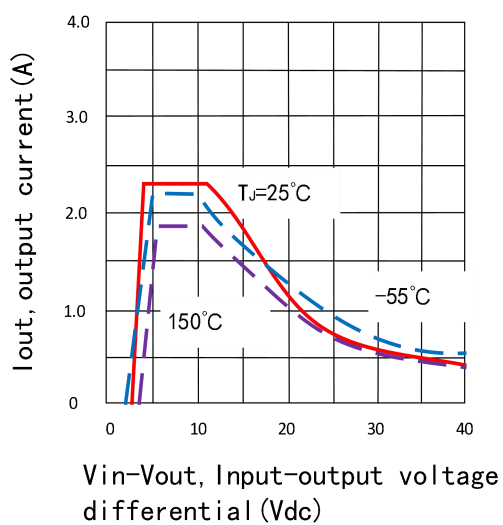


Figure 6. Current Limit

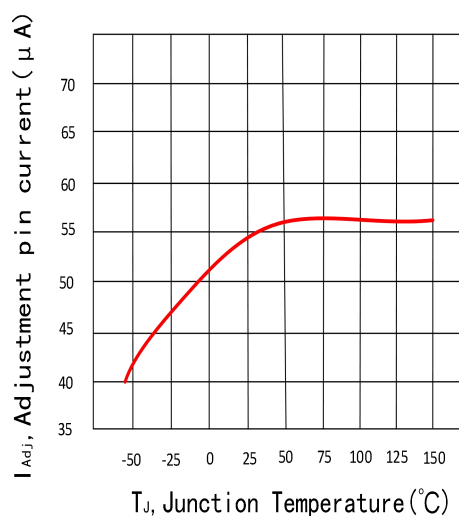


Figure 7. Adjustment Pin Current

Package Outline Dimensions

TO-252-3

Unit: mm

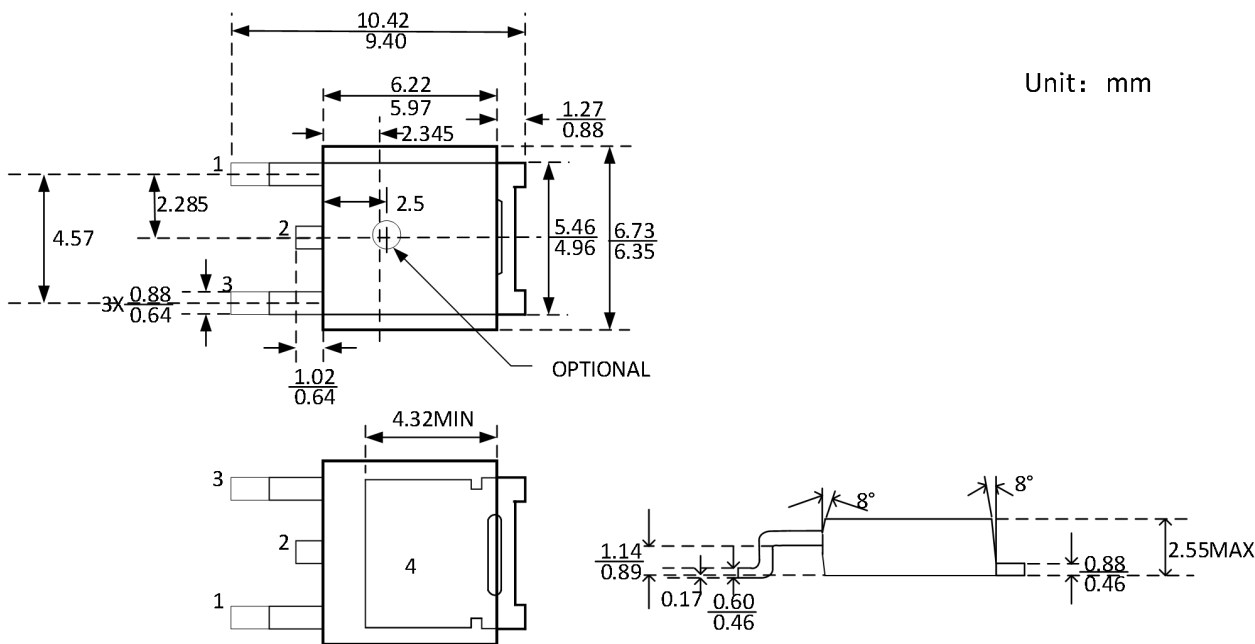


Figure 8. TO252-3 Packaging Dimensional Drawing

TO-263-3

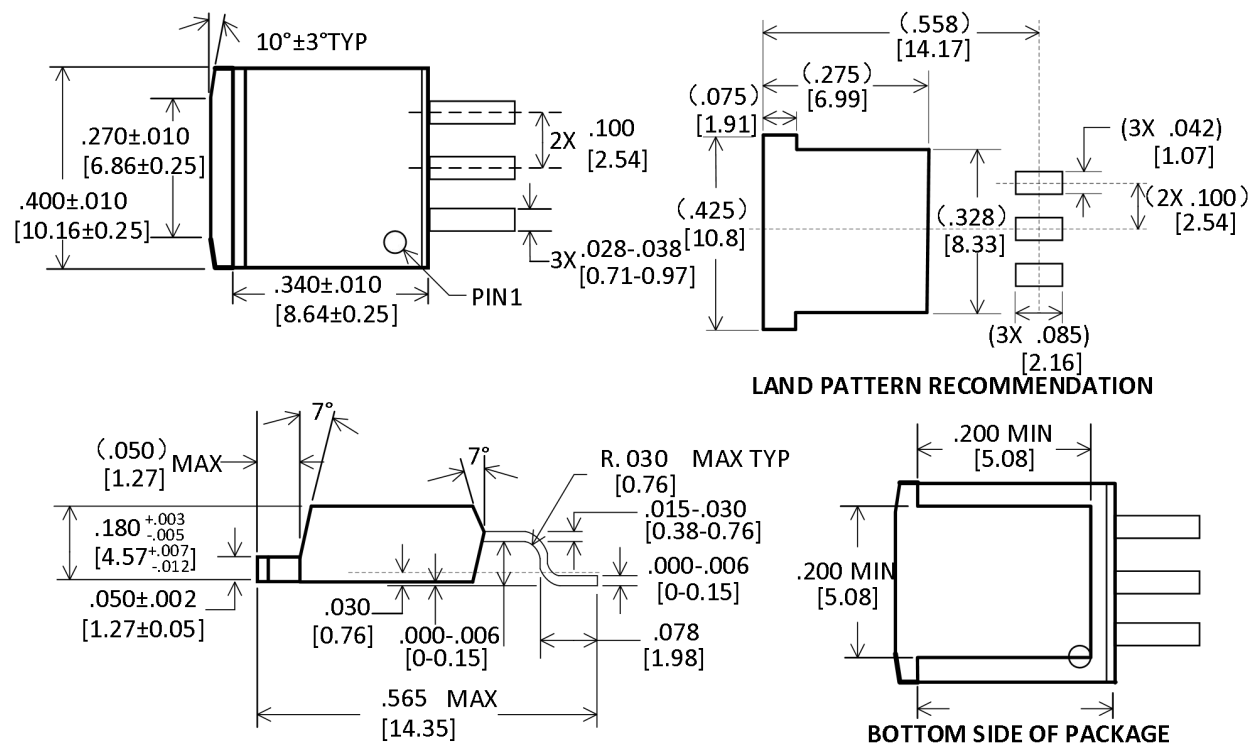


Figure 9. TO263-3 Packaging Dimensional Drawing

Package/Ordering Information

MODEL	TEMPERATURE	PACKAGE DESCRIPTION	PACKAGE OPTION
CD317DT	-40°C~125°C	TO263-3	Tape and Reel,800
CD317DS	-40°C~125°C	TO-252-3	Tube,700

Revision Log

Version	Revision date	Change content	Reason for Change	Modified by	Reviewed By	Note
V1.0	2025.6.12	Initial version	Regular update	WW	LYL	